



LINE N

handleless at nobilia

(Version 24.08.2015 EN)

nobilia-Werke J. Stickling GmbH & Co. KG

nobilia[®]

additional opportunities for wall units

Wall units in the LINE N-program:

- get basically WOG (without surcharge), also corner wall units

(all LINE N-wall units)

and two doors wall units



- for surcharge additional to handle profil, MP-LED, MP-LNP-U, MP-LNP-O, MP-LMP-U, MP-LMP-O



- can with MP-LAN



be equipped with more price WOG

(not available for wall units with 2 doors and corner wall units)

- can with MP-LLIN




be upgraded with additional price to WOG, two doors wall units too

(not available for corner wall units)

Wall units from the normal program will
continue Supplied with more price WOG

optional recessed handle lighting

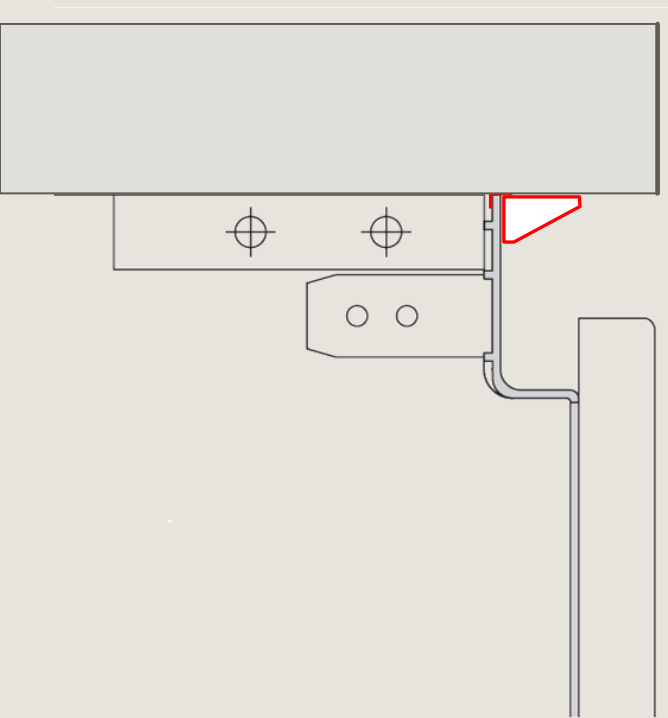

- The horizontal recessed handle on base units (L profile) is also available with LED lighted design (MP-NGML) for a surcharge, refer to base unit chapter, reverse side of chapter index.
- The lighted design is only possible with L profiles.
- C profiles on base and tall units as well as vertical recessed handles cannot be outfitted with lighting.
- Lighted designs can be selected individually for connected planning units. In this way, e.g. a single run out of multiple kitchen runs can be ordered with a lighted design.
- Price is invoiced per started 100 mm.

profiles, accessories and profile transitions

Horizontal grain base-
and high units




handle L-profil
TOP degree in base-
and highboard units

handle C-profil
between 2 fronts

Vertical grain in highboards
and tall units

handle L-profil to upright

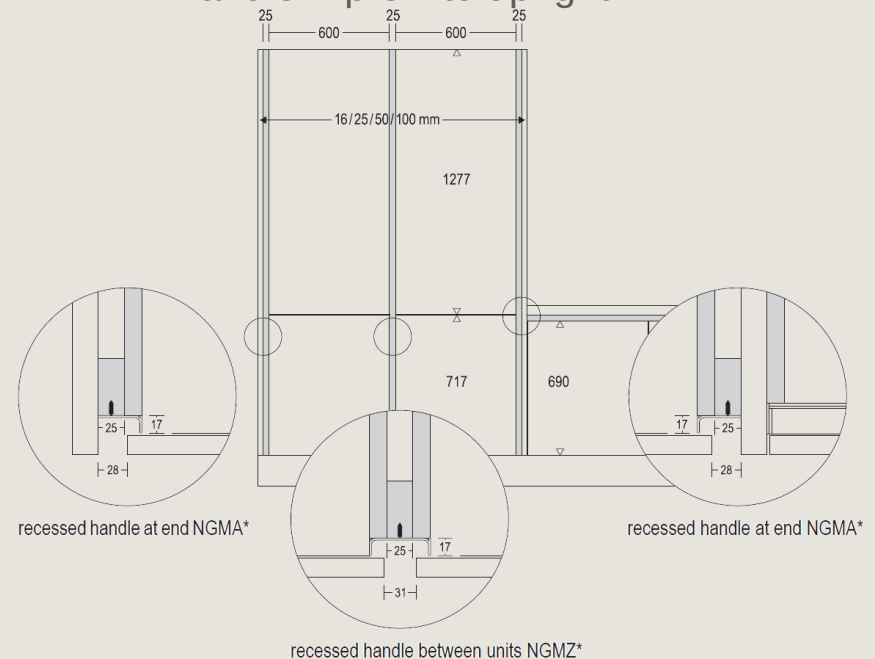

handle C-profil between 2 tall unit fronts

profiles, accessories and profile transitions




milled through

byside Wall, front fillern, upright
and front uprights, **with**
continuous profiles,
transition from C- to L-profil



milled pocket

for **visible carcass side,**
filler (carcase) and at
transition to dishwasher, fridge and
freezer under the worktop

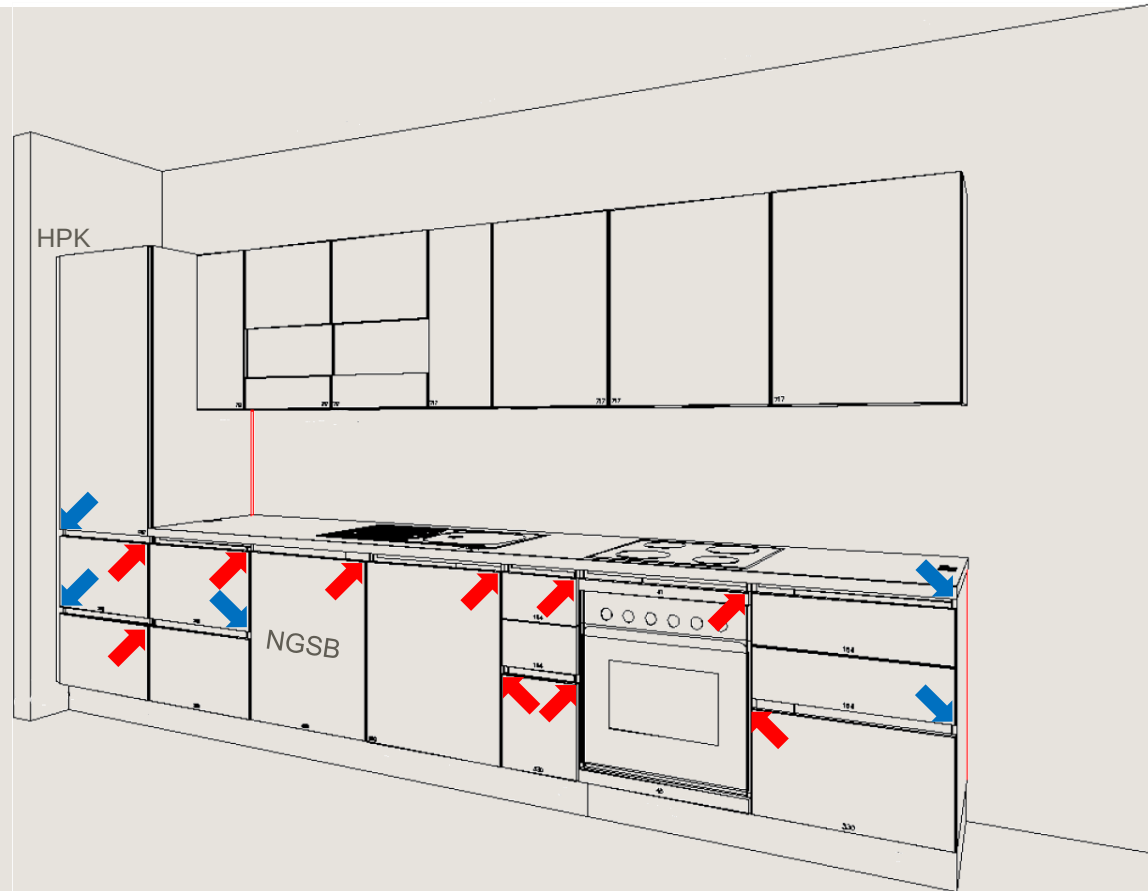

profiles, accessories and profile transitions



milled through
by side Wall, front fillern,
uprights and
front uprights,
with continuous profiles




milled pocket
for visible carcass side,
filler (carcase) and at
transition to dishwasher, fridge and
freezer under the worktop



profiles, accessories and profile transitions




without wall
with HPK

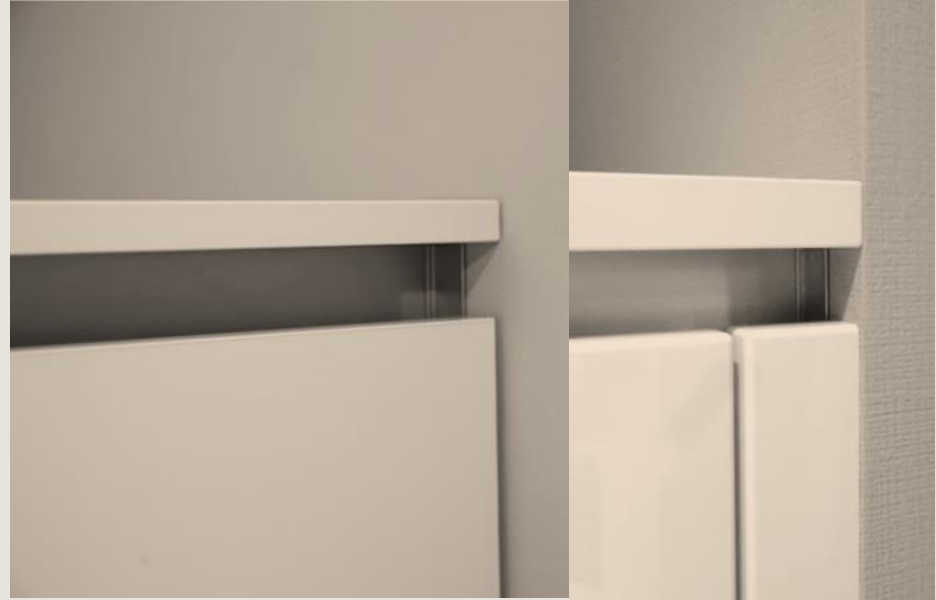

with wall
with HPD or upright

only fully integrated dishwasher



	Door front for fully integrated built-under appliances for appliance height: 810 to 820 mm, includes spacer strips, stainless steel colour		
	NGSB	45	51820
	NGSB	60	51866


690 mm appliance door **for maximum 820 mm appliance height**. Dishwasher is ending under the L-profil. The perfect solution to integrate a dishwasher.

Also 820 mm high XXL-appliances from Elektrolux are possible to plan.

Plinth height at least 150mm.

only fully integrated dishwasher




	Door front for fully integrated large-capacity dishwasher for appliance height: 860 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle		
	NGGSB	60	51878



Large-capacity dishwasher from BSH-grup and other **dishwasher with appliance hight 860 mm**. Recessed handle is cutted and get a 3 mm hairline joint.

Front is planned with 25 mm spacer frame and integrated recessed handle. The plint get a cut out underneath the diswasher. **Plinth high at least 150mm.**

only fully integrated dishwasher

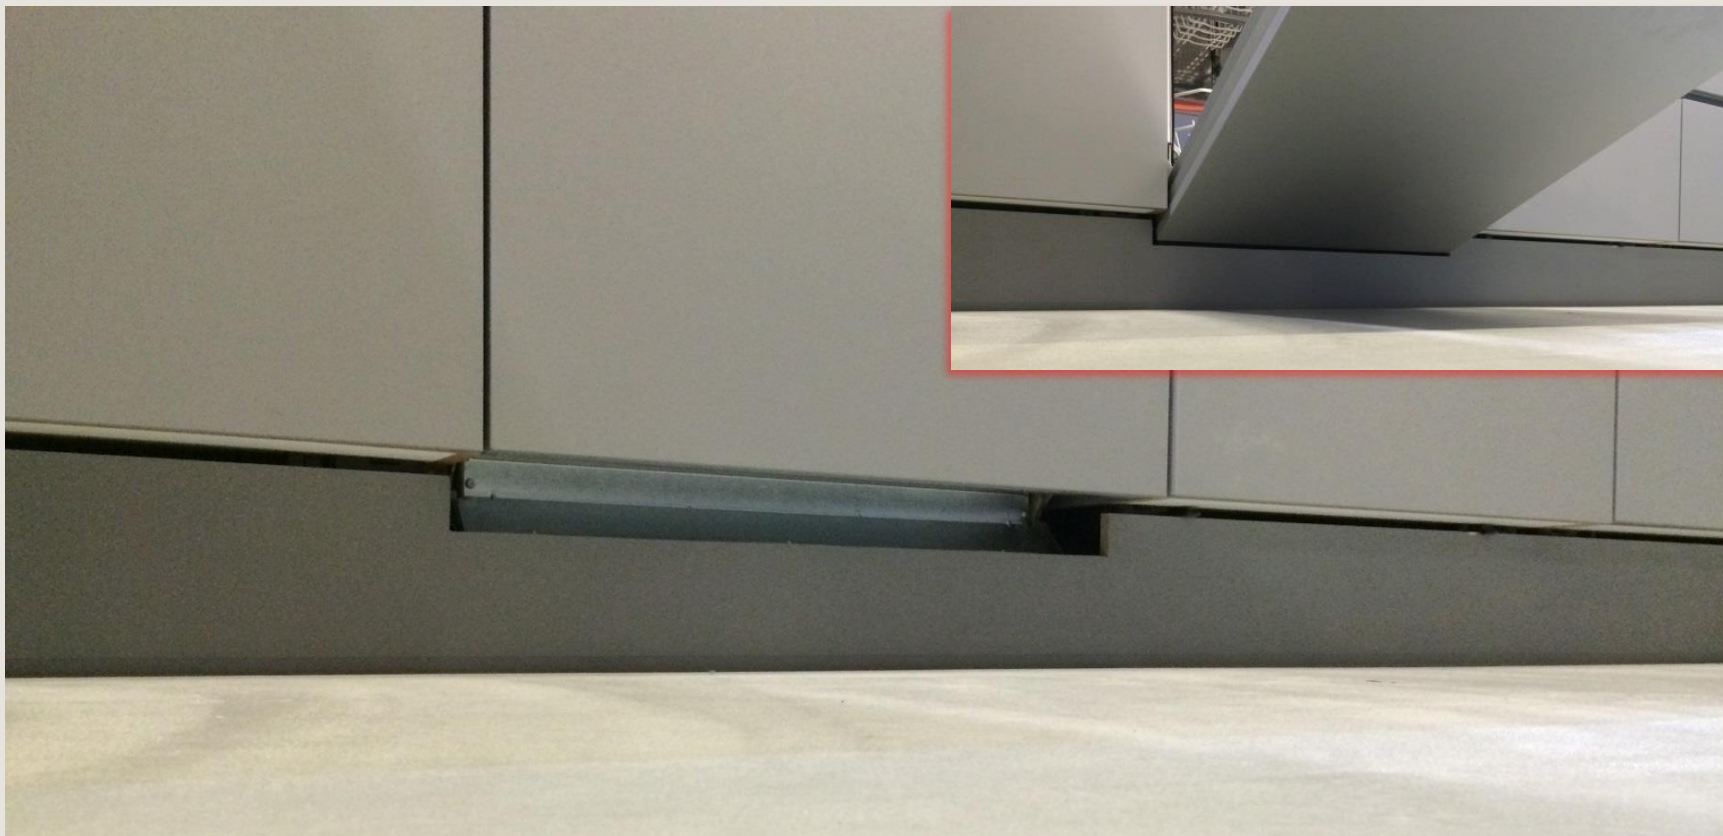

planned price segments


inexpensive

With pocket milled for visible carcass sides. Stainless steel finish cover profil (NADP..) behind base- and tall units.



The tall unit cover is not required when using a niche cladding in port.

When installing flat fans, the doors are opened with PTO5.

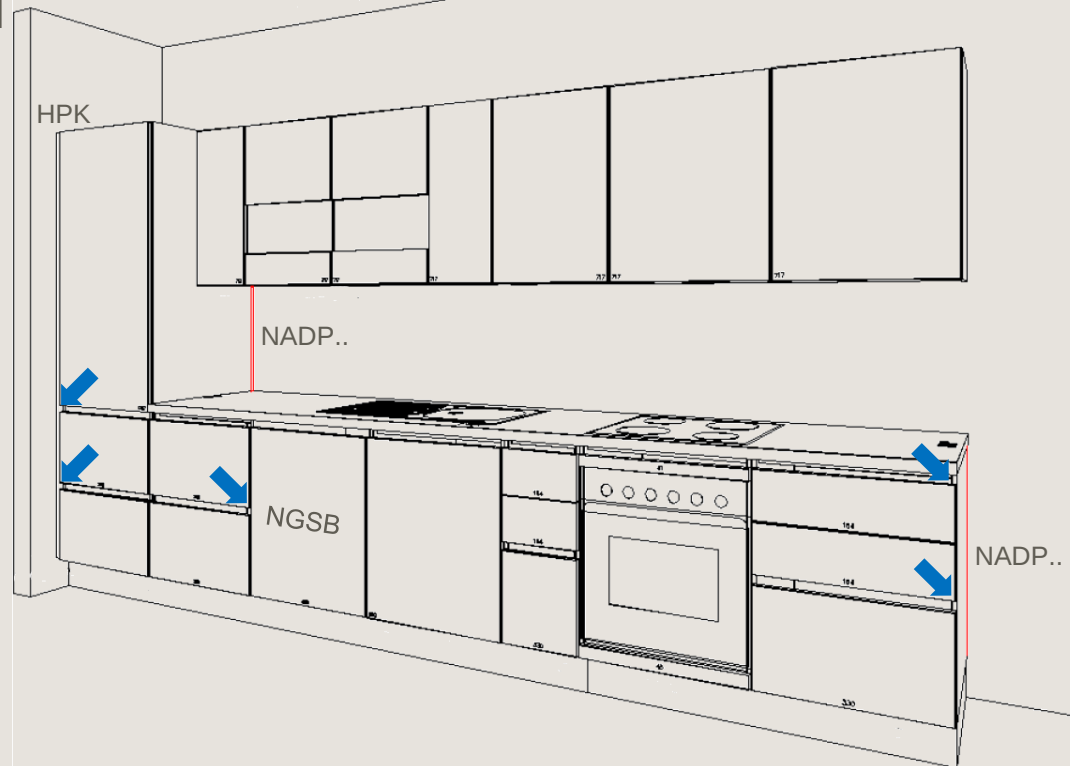

planned price segments

comfort


With uprights 16/25/50 mm
completed classic.

Uprights complete grip profiles or interrupt
the course.

Recessed handle is consistently available to
4m and is only interrupted by uprights, offsets
or transitions of C-profil to L-profile.

Following cheek always end cap!
To wall with overhang of 30mm profile!


Uprights standard depth 597 mm, mounted
flush with the front.



LINE N upright at end of run
incl. floor profile in stainless steel appearance,
depth: 597 mm,
for plans with 600 mm worktop depth

Plinth height 70 mm: 790 mm
Plinth height 100 mm: 820 mm
Plinth height 150 mm: 870 mm
Plinth height 200 mm: 920 mm


NUWA	16
NUWA	25
NUWA	50

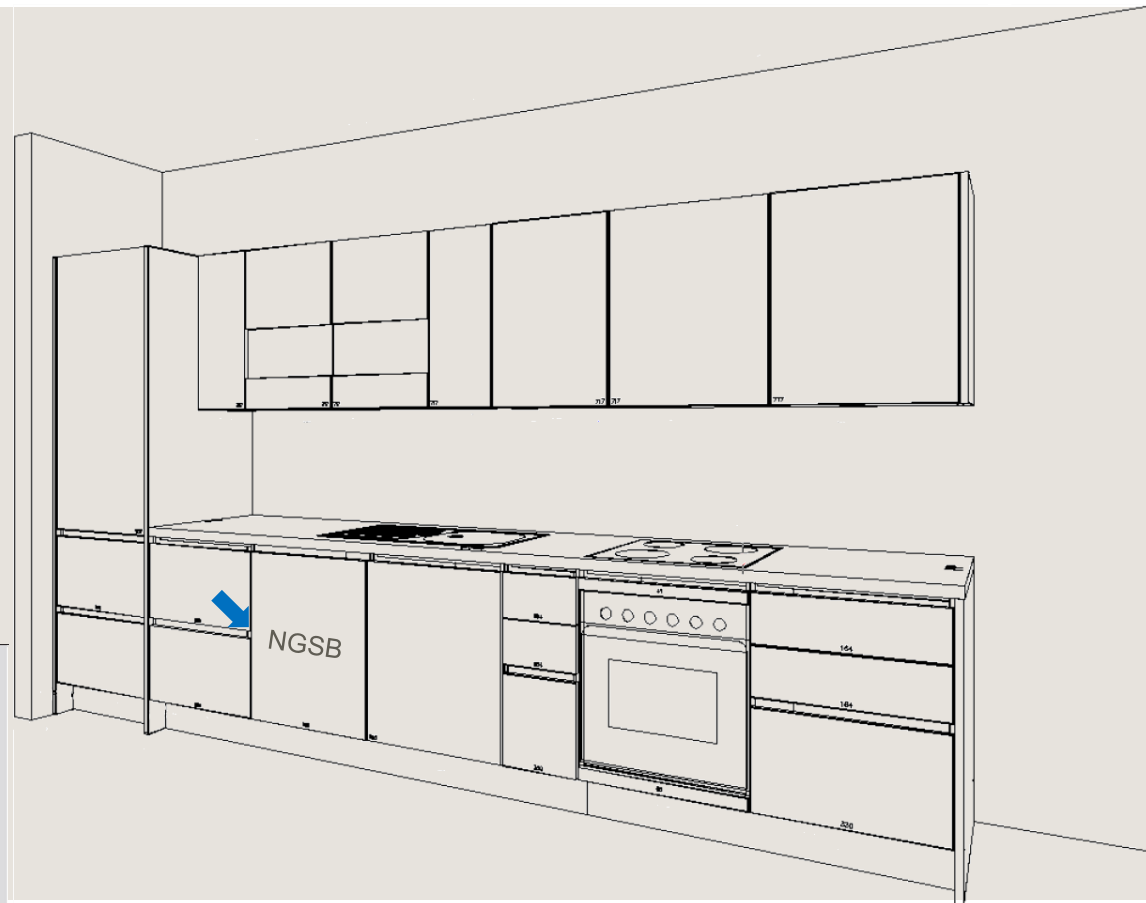


planned price segments

exclusive


With front at end of run upright 50 mm including recessed handle.

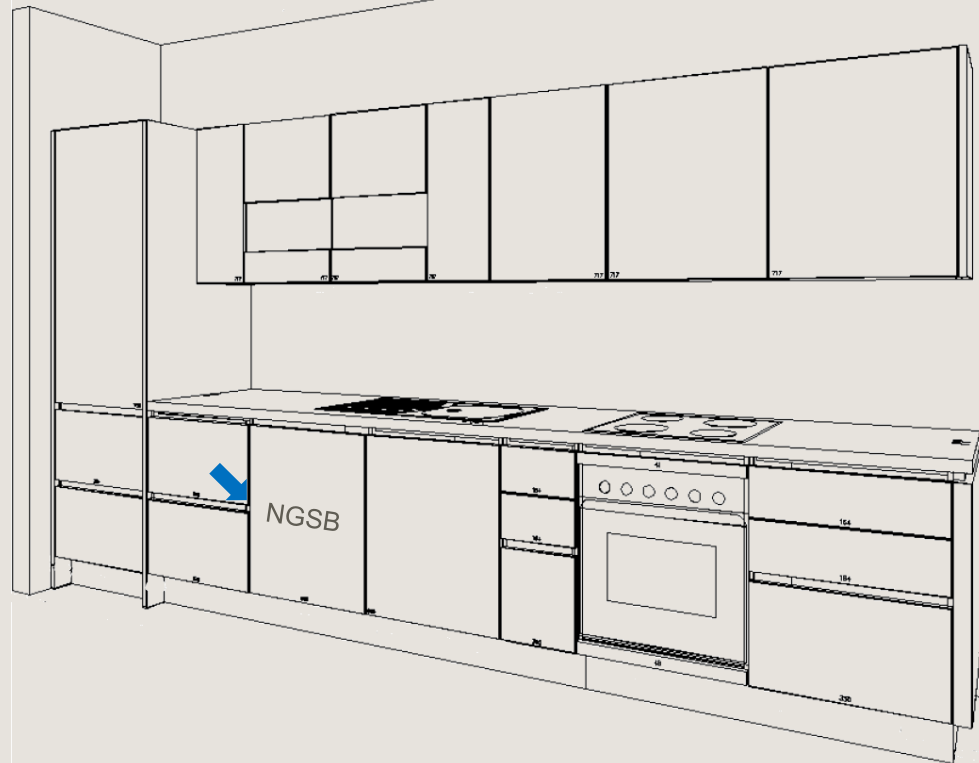

varied degree options

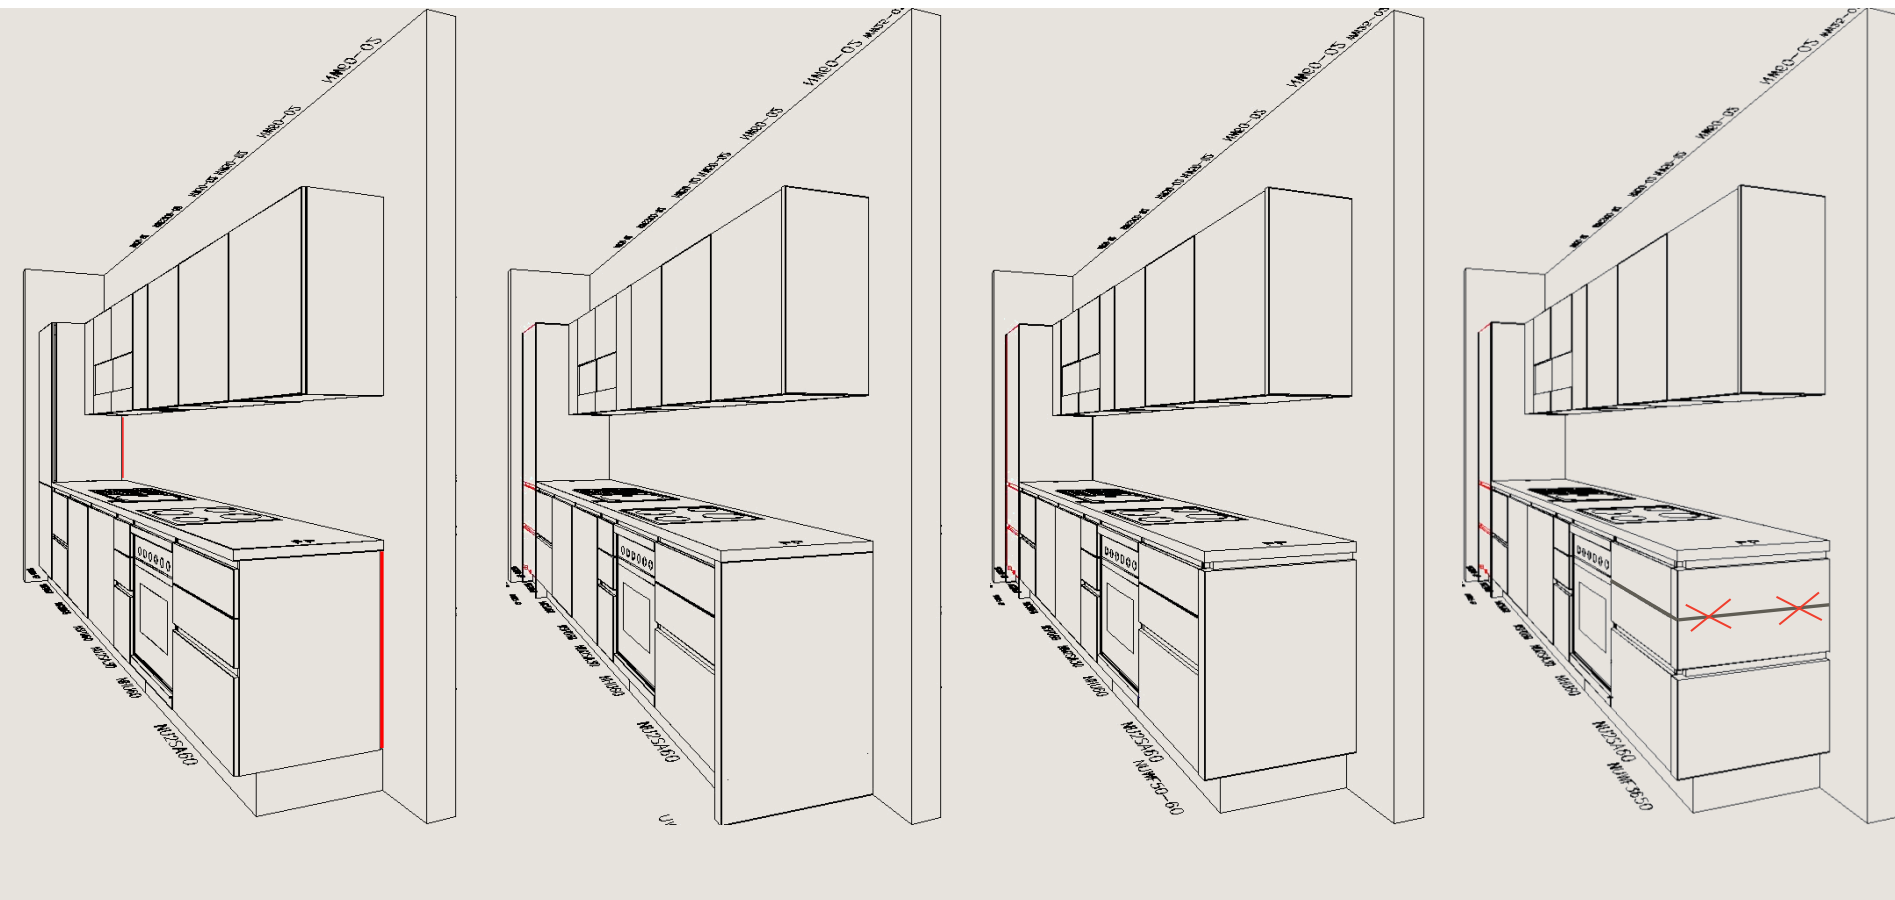

base unit 360 mm high

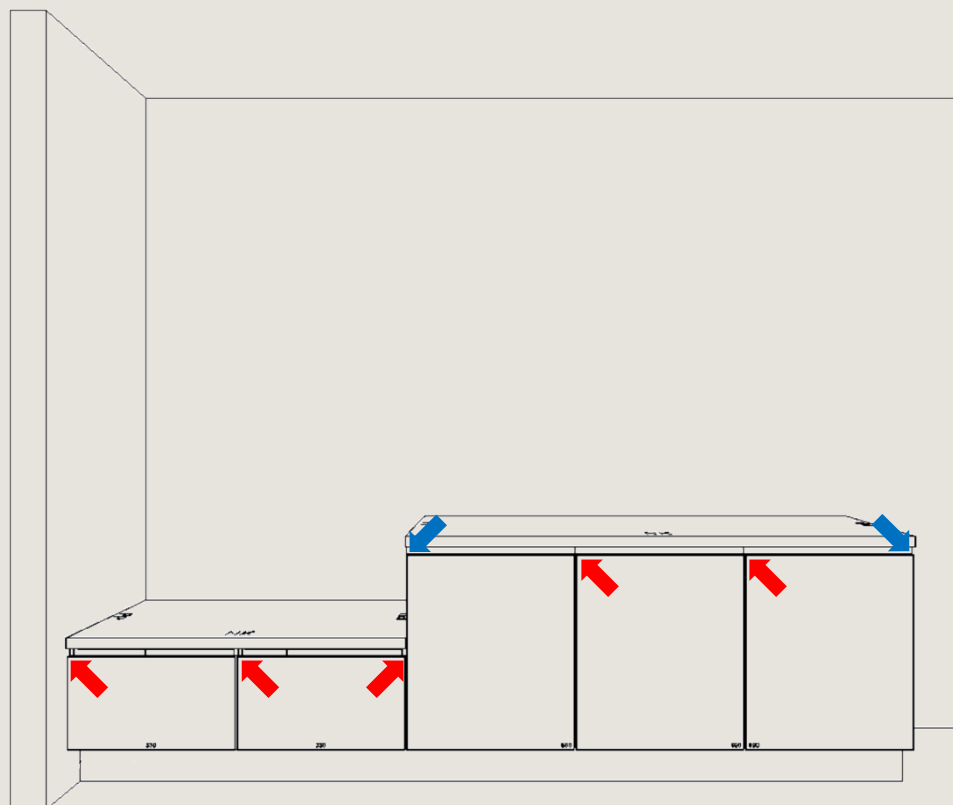


tall units

Caution! 1455 mm high fronts are available only for LINE N!





only fully integrated dishwasher

LINE N remodeling solutions are created
including dishwasher front.

E	 Appliance housing for dishwasher aperture height: 820 mm comprising of: top section with 1 door, 2 shelves, 1 door front for fully integrated dishwasher	NGGSP	60		43519
E	 Appliance housing for oven/ dishwasher aperture height: 590 mm aperture height: 820 mm comprising of: top section with 2 compensation panels, 1 door front for fully integrated dishwasher	NGOGSP	60		43527
E	 Appliance housing for dishwasher aperture height: 870 mm comprising of: top section with 1 door, 1 shelf, 1 steam protection plate, 1 door front for fully integrated dishwasher, bottom section with pull-out, 420 mm deep, 1 fixed pull-out panel (oblique cut), 1 drip tray	NGGSP	60	-02	53547

advice for planning with individual hobs

KKB / DBKI / NDBKI

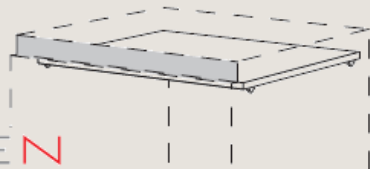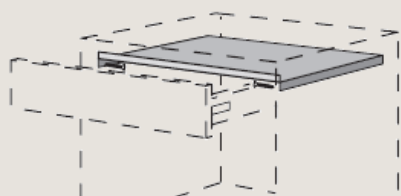

For operation of **conventional** or **induction hot plates** in 40 mm worktops directly above a drawer, pull-out or hinged door, a heat protection panel (KKB, DBKI, NDBKI) must be installed for safety reasons.

Please take the following points into consideration when planning your kitchen and include the respective information with your future order.


As a rule when ordering:

- For reasons of safety and product liability we are obligated to confirm and deliver the respective heat protection panel (KKB, DBKI, NDBKI) with all orders that include the hot plate.
- For this reason, it is **not** possible to delete the heat protection panel!
- With LINE N kitchens, the recessed handle is provided with an additional milled opening for ventilation (MP-NAUSI).
- If the hot plate is **not** an integral component of the order, please inform us **in writing**, whether the required heat protection is also to be supplied by the third-party supplier / appliance manufacturer.
- If this information is missing from your order, we are obligated to confirm and deliver the respective heat protection panel.

Observe during kitchen planning:

- For planning hot plates across several base units, adjacent units with a width of 150 and 200 mm can be planned without a heat protection panel, as long as the central hot plate unit has a minimum width of 500 mm and is equipped with the respective heat protection panel.
- Planning of **induction hot plates** above **2-door** base units is **not** permitted, because the heat panel (DBKI) cannot be adapted at the factory nor on site.
- Planning hot plates above carousel units and half corner base units is **not** permitted because fittings technology and the peculiarities of construction prevent installation of a heat protection panel.
- For safety reasons it is **not** permissible to install hot plates above built-under appliances (dishwashers, fridges, etc.).


measure specials at corner planning

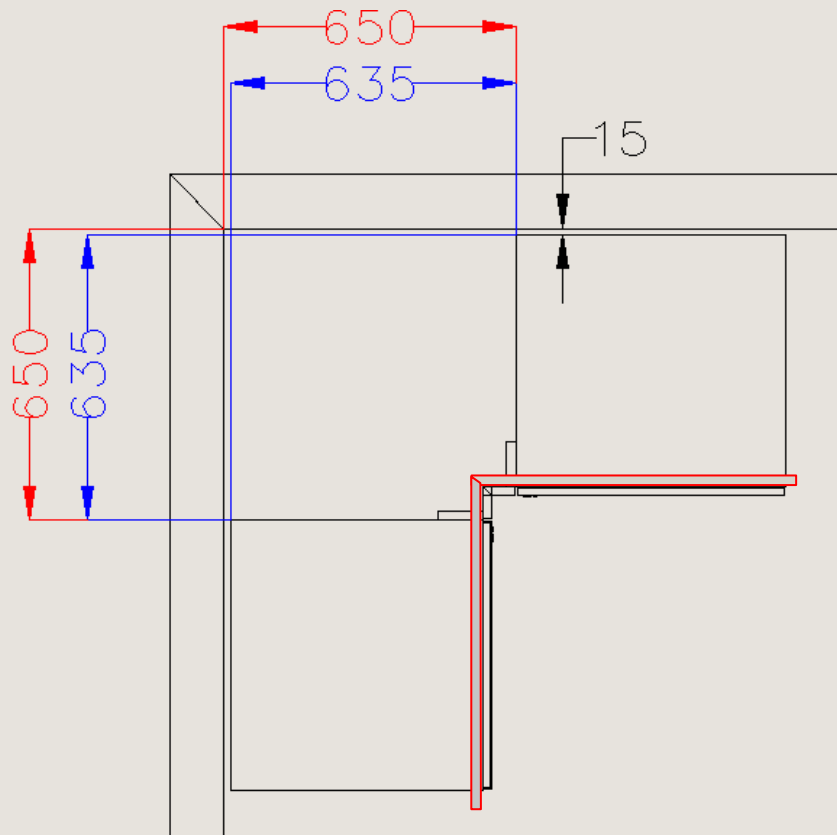


carcase distance
to the wall 15mm


planning dimension :
650 x 650

required floor space :
635 x 635

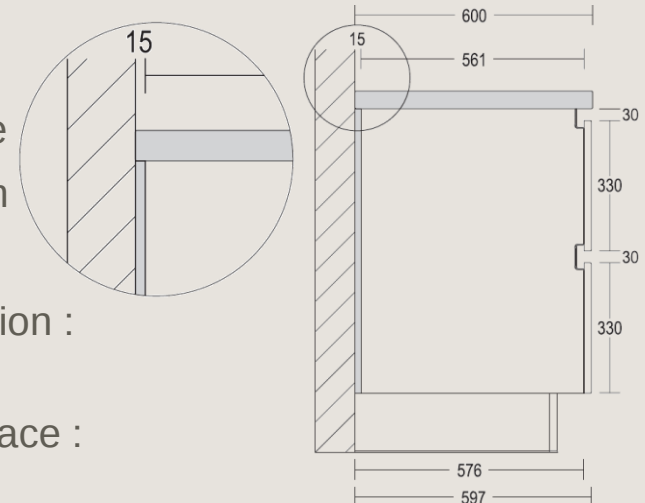

	Angle filler Front material, 55 x 55 mm Required floor space: 635 x 635 mm Planning dimensions: 650 x 650 mm	NUPE	51143
	as above, however variable from 35 to 155 mm, Required floor space: 615 - 735 mm Planning dimensions: 630 - 750 mm 1st dimension = left / 2nd dimension = right	NUPE-V	51144


measure specials at corner planning

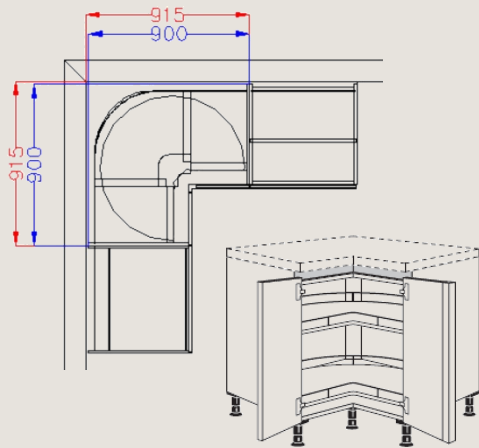

carcase space always
to the wall 15mm!

planning dimension :
915 x 915


required floor space :
900 x 900

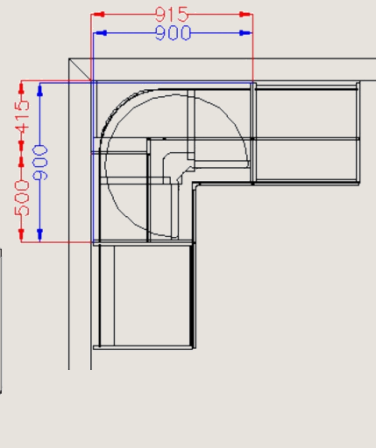

Corner wall unit
NWE 90-50-02

planning dimension :
415 x 915


required floor space :
415 x 915

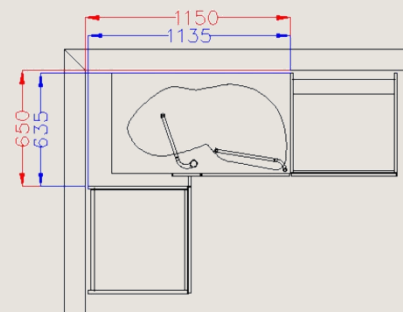

carcase space to the
wall 15mm

planning dimension :
650 x 1150

required floor space :
635 x 1135

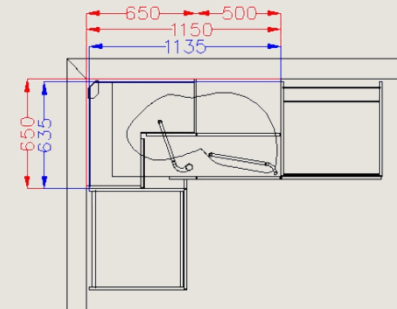

Corner wall unit
NWE 65-02


planning dimension :
650 x 650

required floor space :
650 x 650

measure specials at wall- and islandplanings

Planning always with 15 mm gap.


Reason is: the appliances (hob and sink) will be mounted after the recessed handles. The gap between wall and appliances must be 50 mm at least.



black	→	carcase depth
red	→	overhang and joints
blue	→	upright depth
green	→	worktop depth


Island planning with Line N front upright for room design

Front uprights are in flush front line, overhang front and rear are 3 mm, by side 1,5 mm.

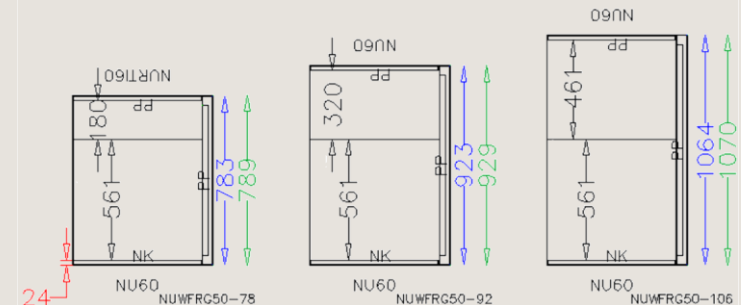



Island planning with lacquer upright for room design

Uprights are flush with planned front. In compliance with our lacquer upright-standard measures, the following measures:

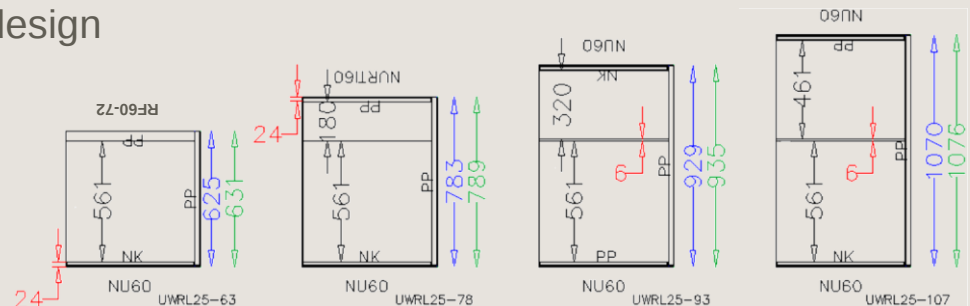


special features of island planning

Base unit back panel front material can not be planned with recessed handle.







Frame element for island design 30, 40, 45, 50 und 60 cm width with recessed handle.






Base unit in carcass depth 320mm (better 326 mm) with TK32 or UTK.

Wall units are not possible with recessed handle. Wandschränke mit MP-SB haben keine Griffmulde. Alternative is planning PTO5.




Profile with horizontal revolving door = **NOWB 90°** series


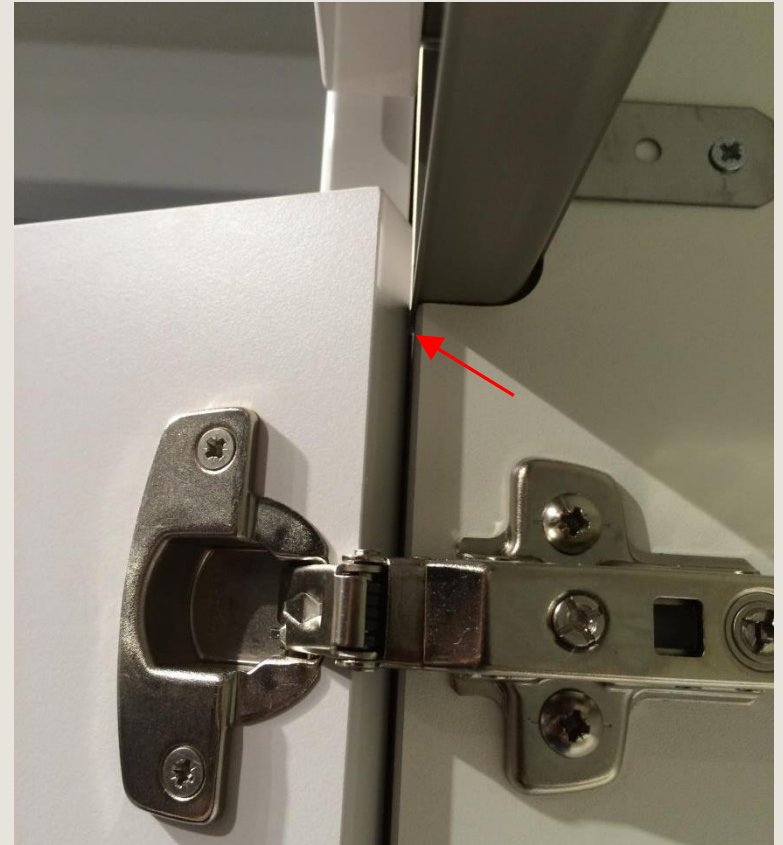


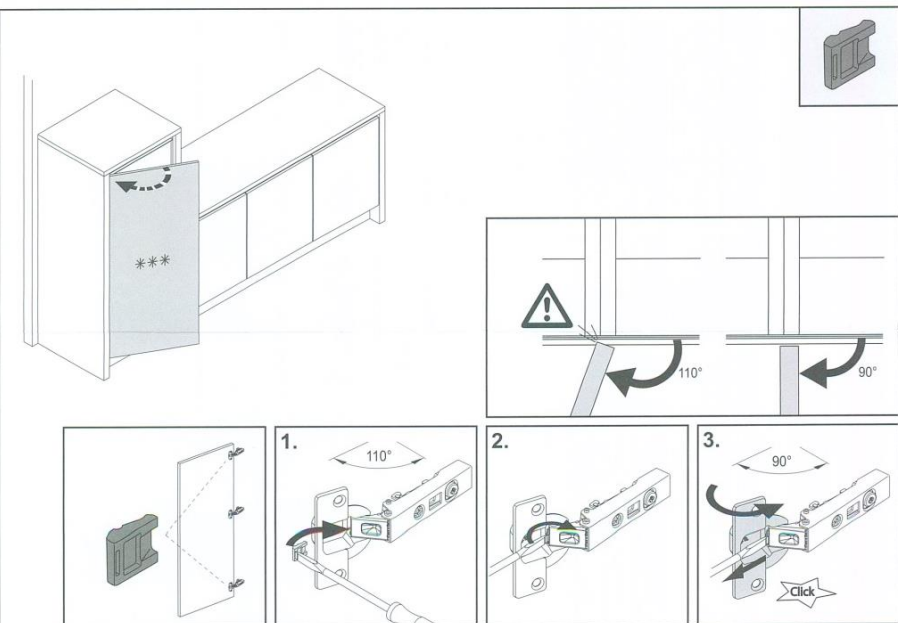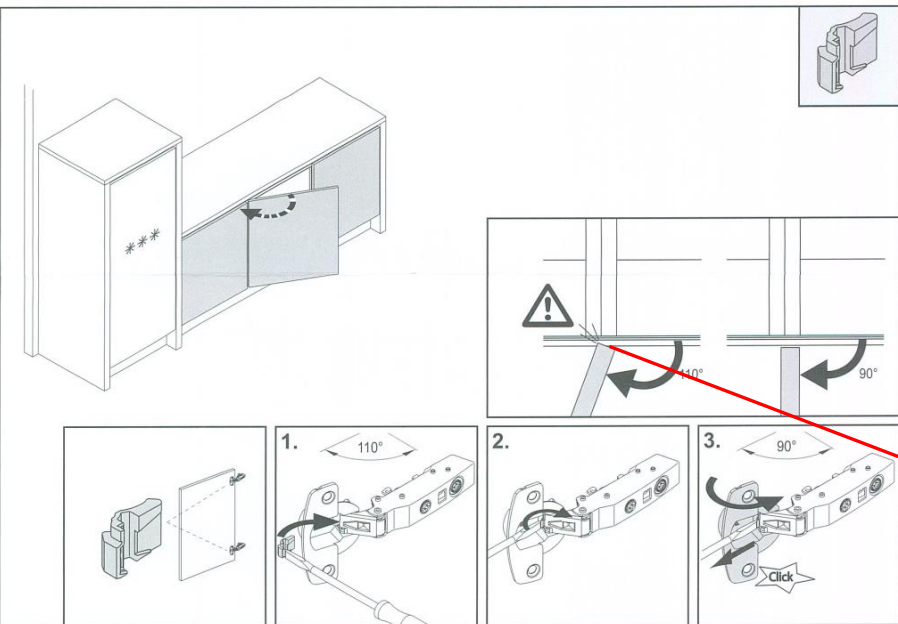

01.2014

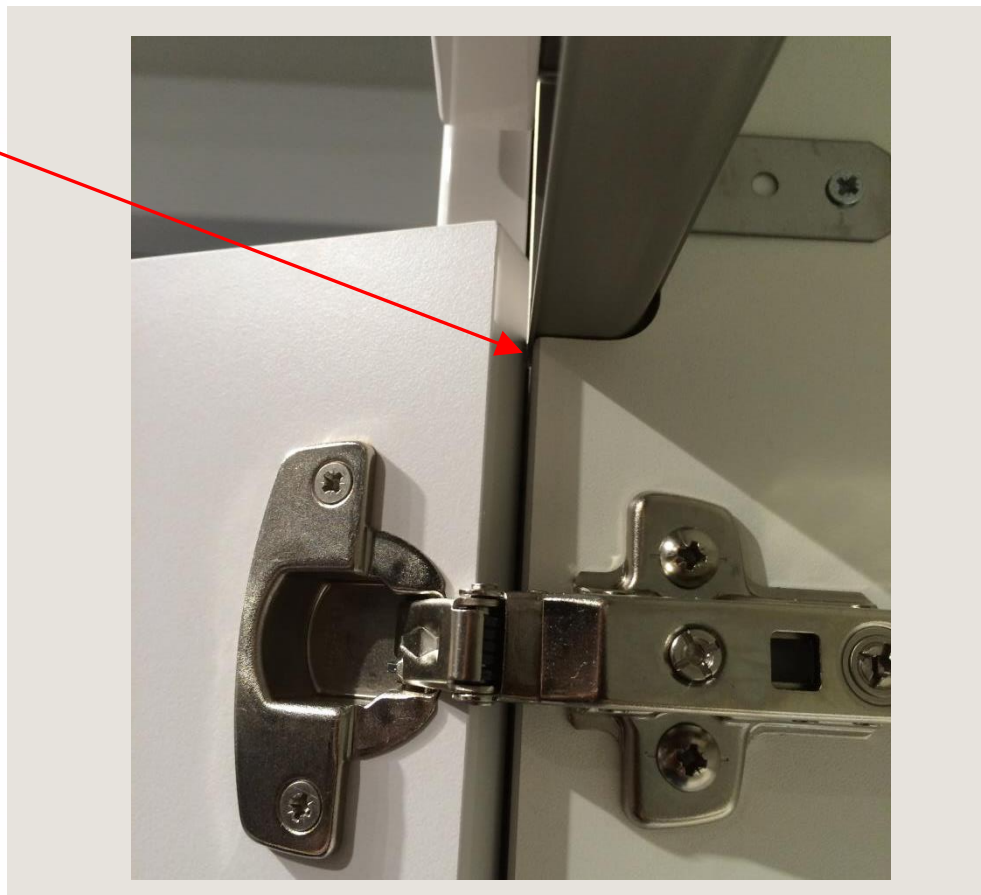

details

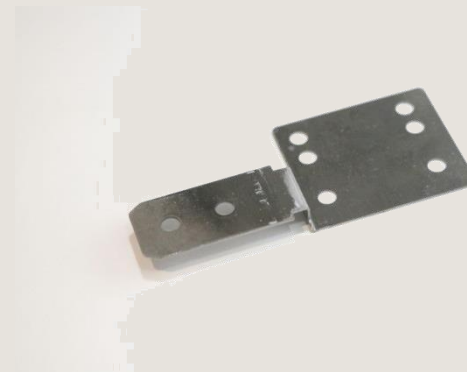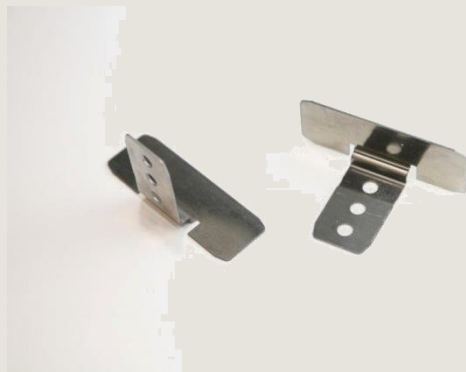

DE Montageanleitung

EN Table of Contents

IT Istruzioni generali per il montaggio

HU Általános szerelési útmutató

GR Γενικές οδηγίες συναρμολόγησης

PL Ogólna instrukcja montażu

FR Instructions de montage

ES Índice de contenido

HR Opća uputa za montažu

SK Všeobecný návod na montáž

TR Genel Montaj Talimatı

RU Общее руководство по монтажу

NL Montagehandleiding



SE Innehåll

SI Splošna navodila za montažo


CZ Všeobecný montážní návod


PT Instruções gerais de montagem



DK Generel monteringsvejledning

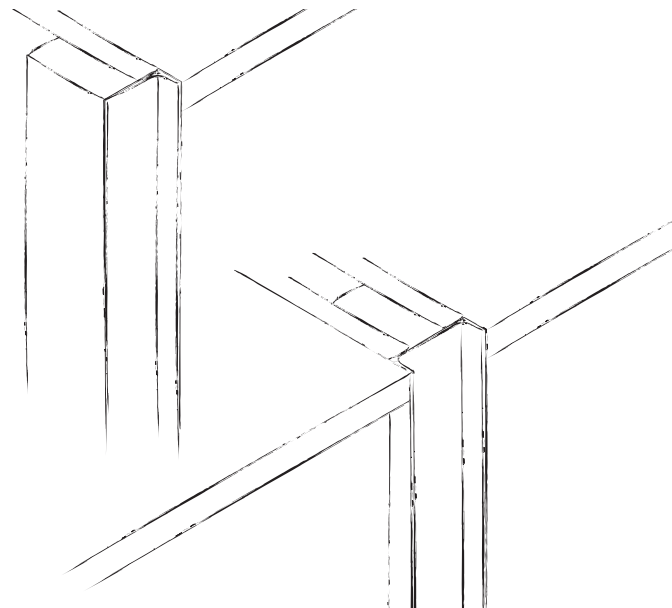
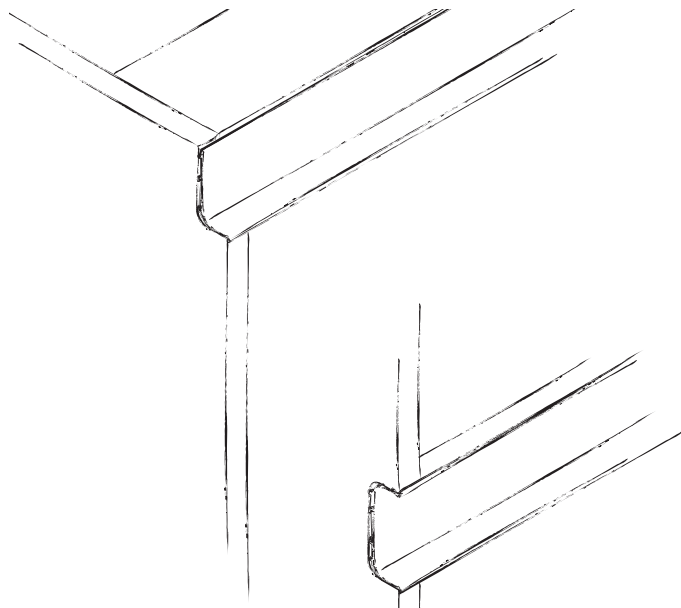




DE - Vor Montagebeginn / **FR** - Avant le début du montage / **NL** - Voorafgaand aan het monteren / **EN** - Prior to Installation / **ES** - Antes de comenzar con el montaje / **SE** - Innan du monterar / **IT** - Prima del montaggio / **HR** - Prije početka montaže / **SI** - Pred začetkom montaže


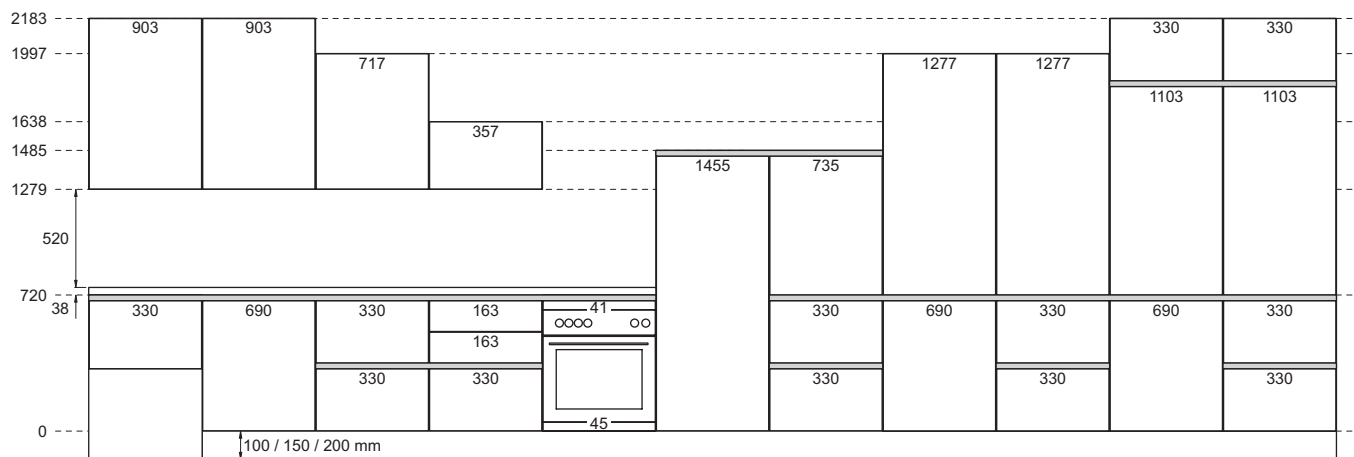



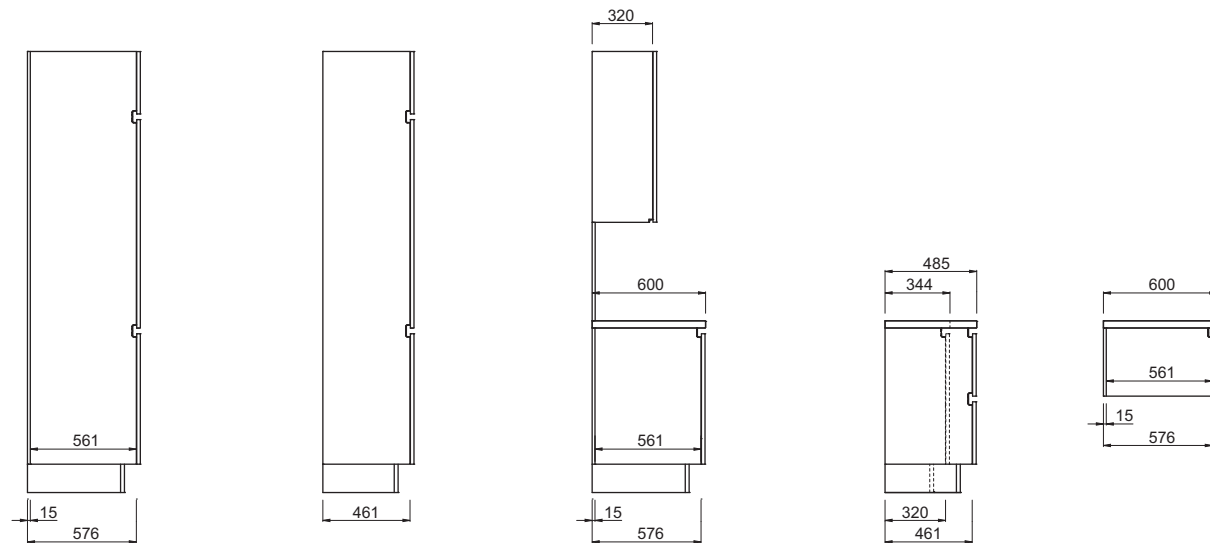


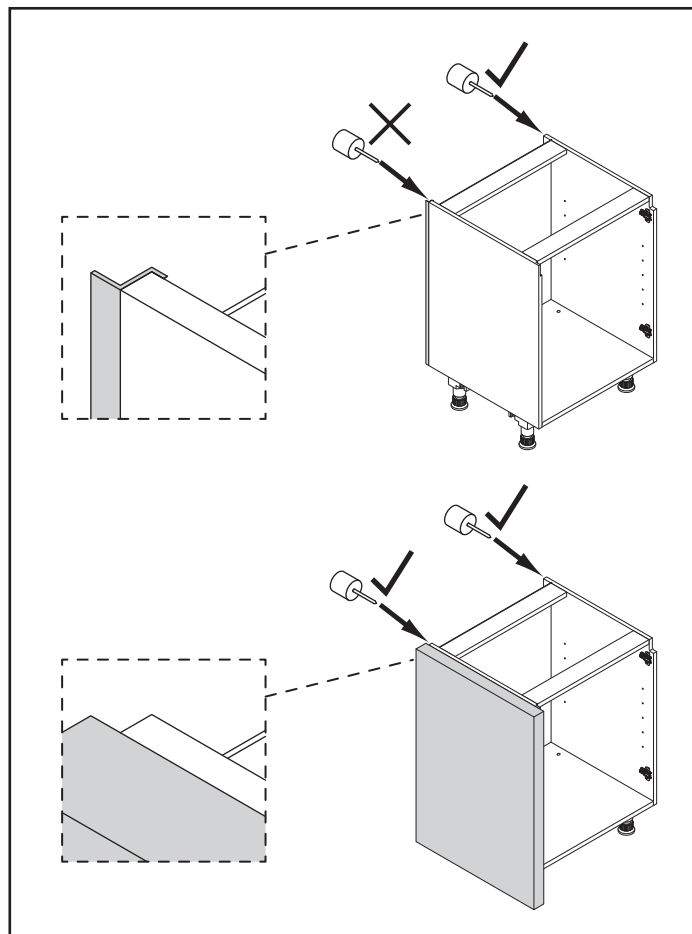
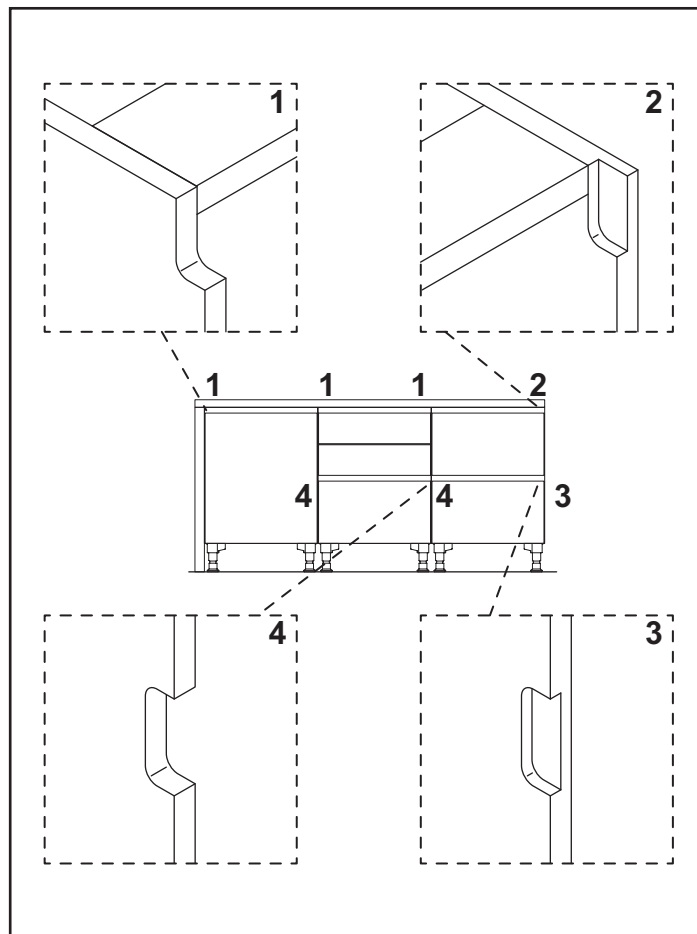


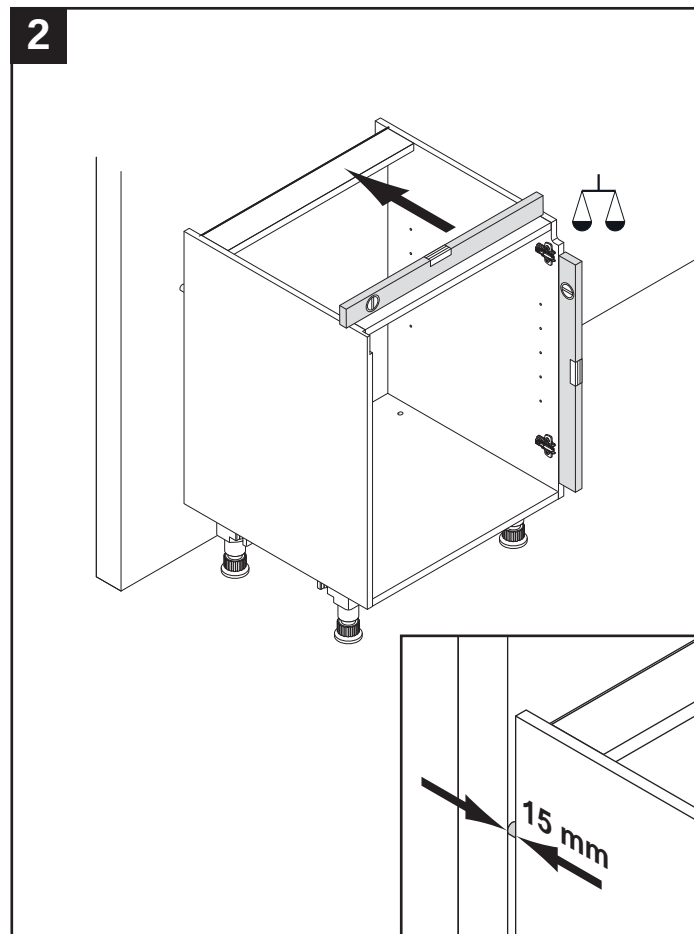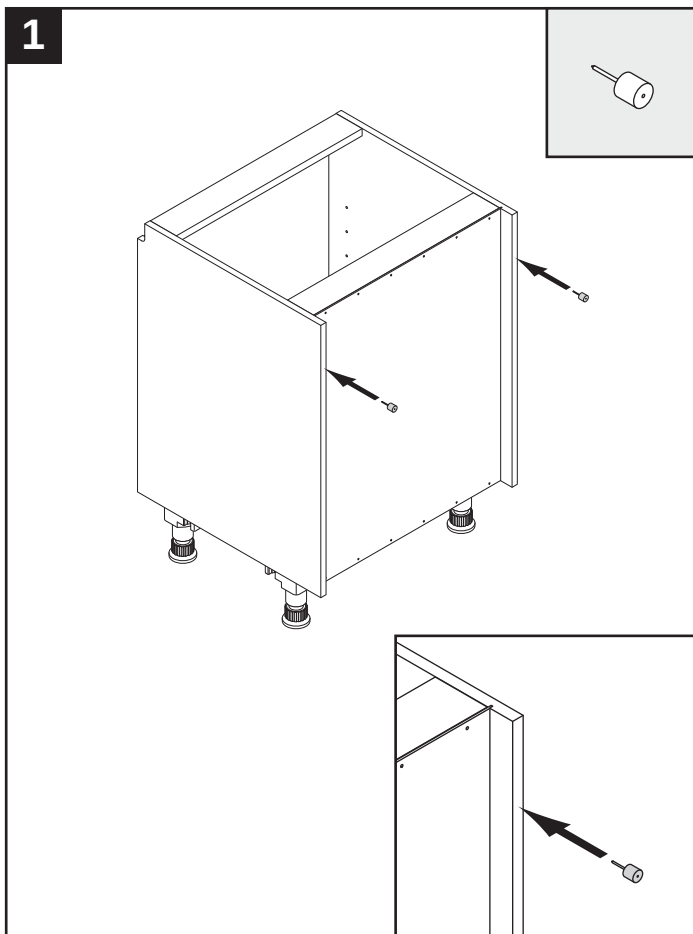

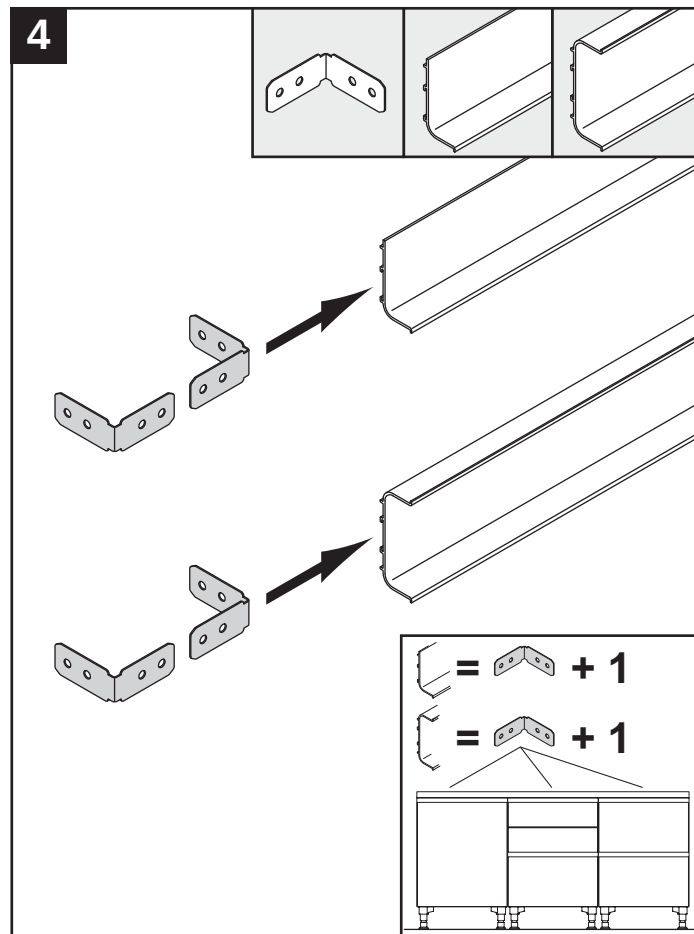
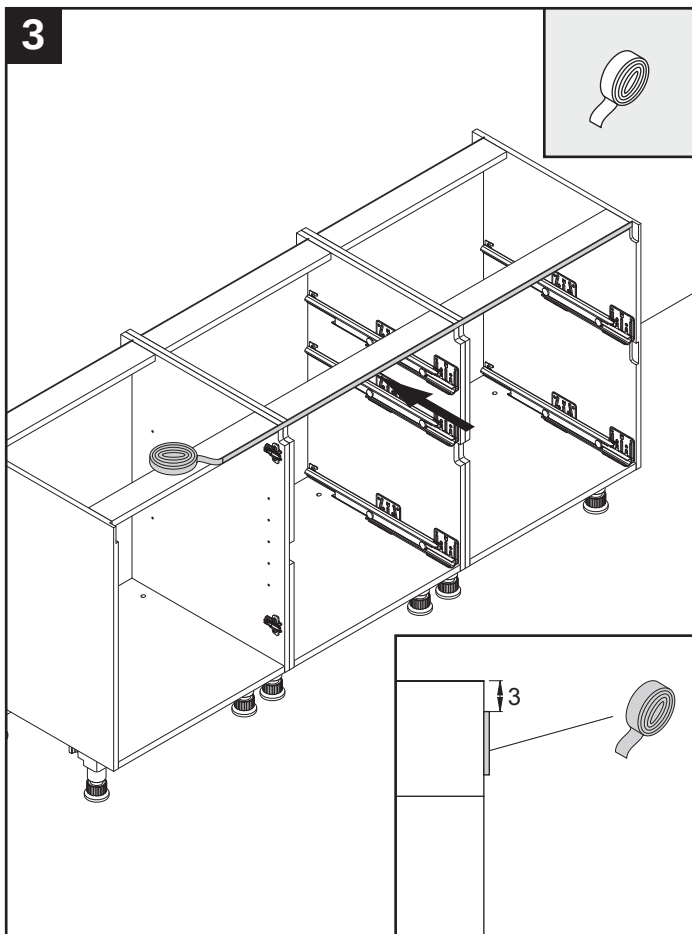


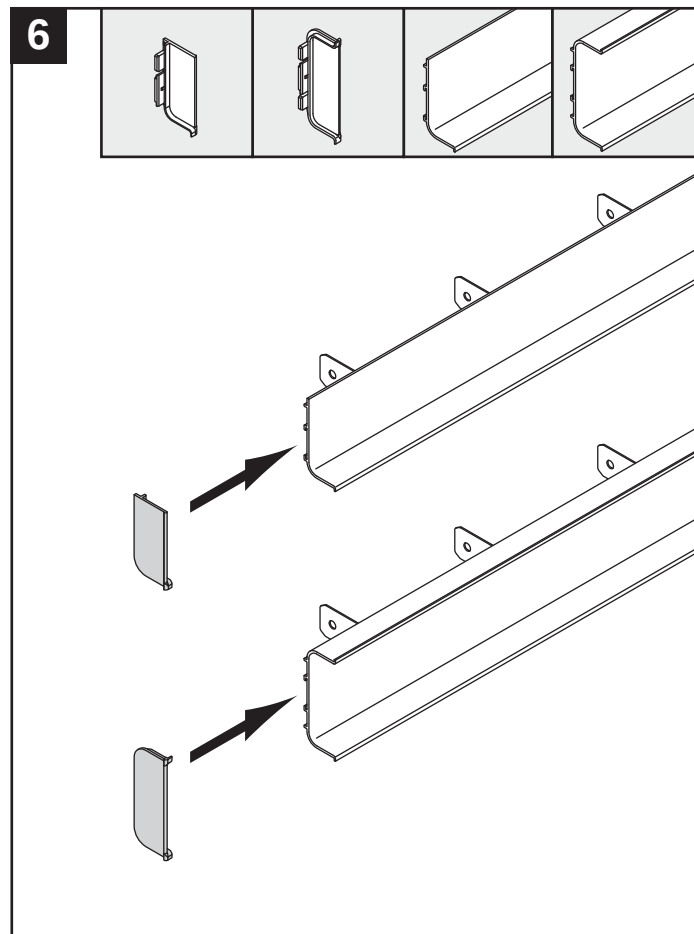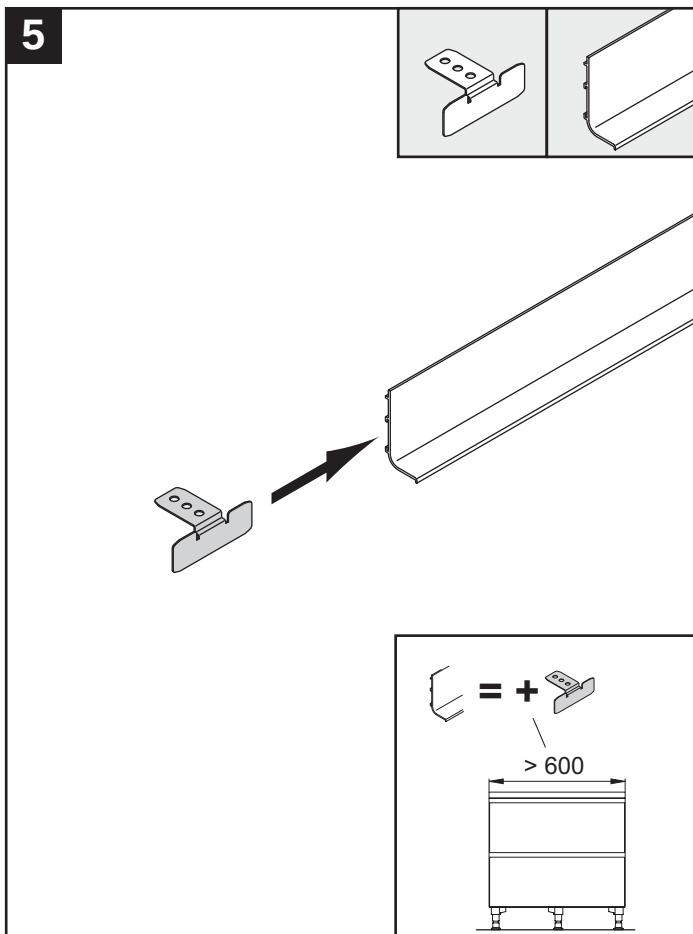





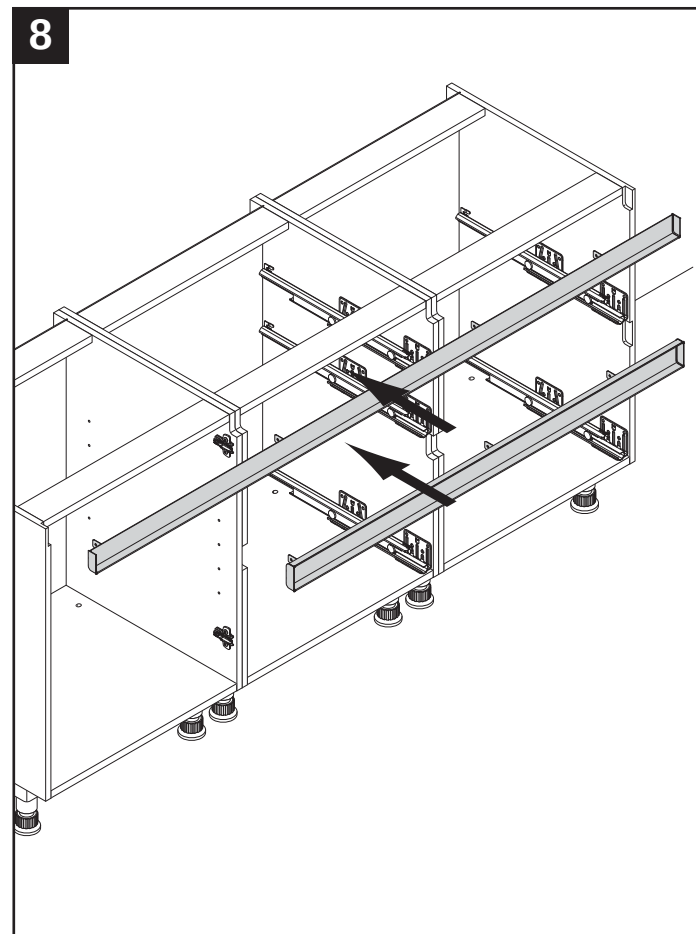
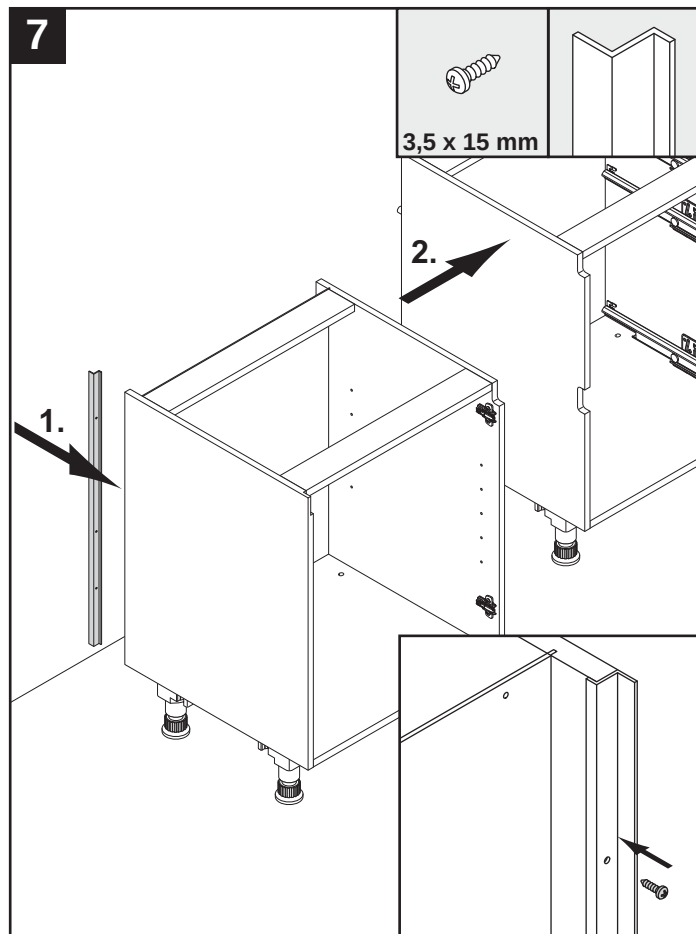


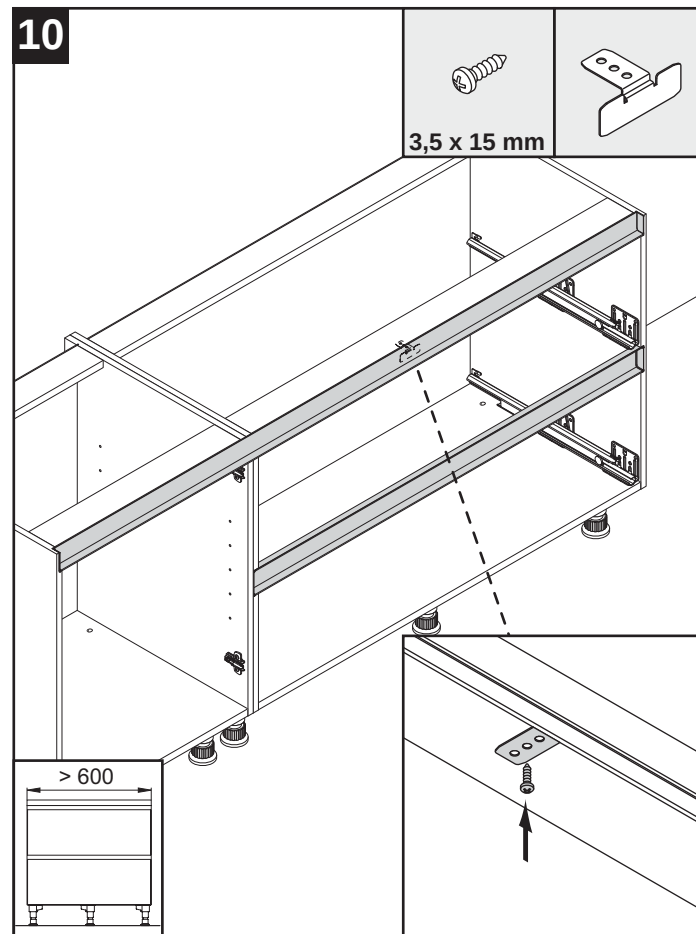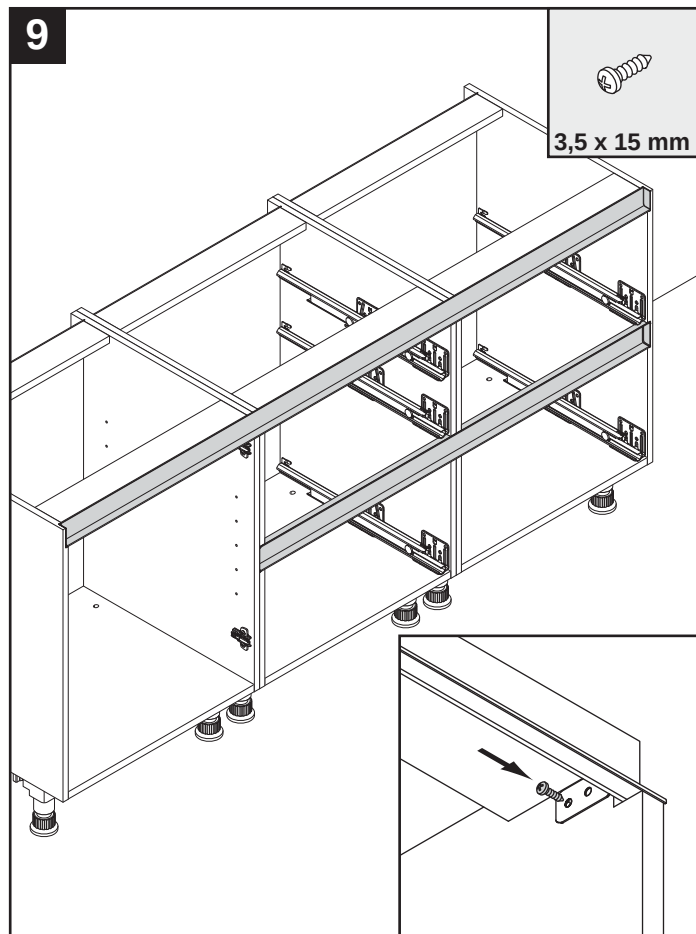







11

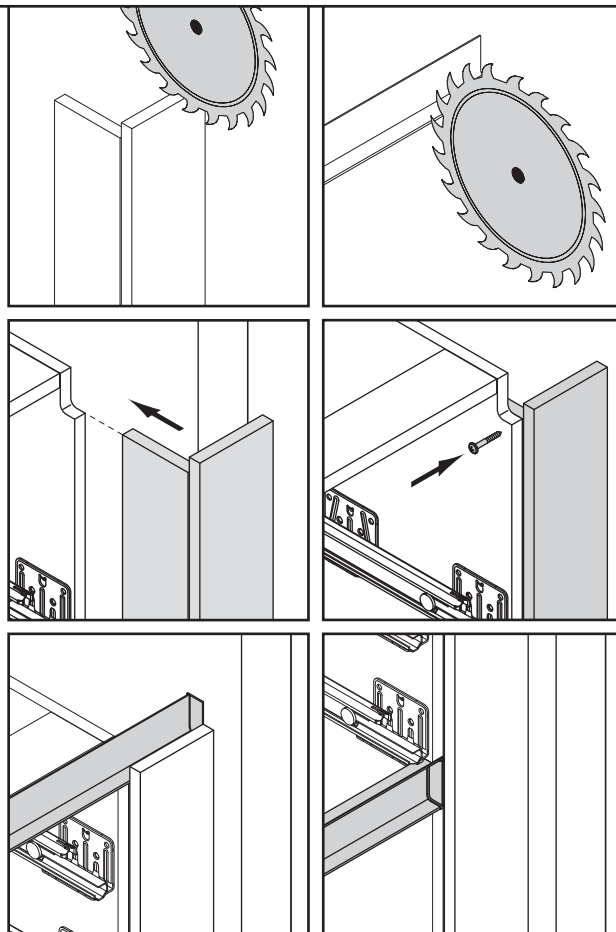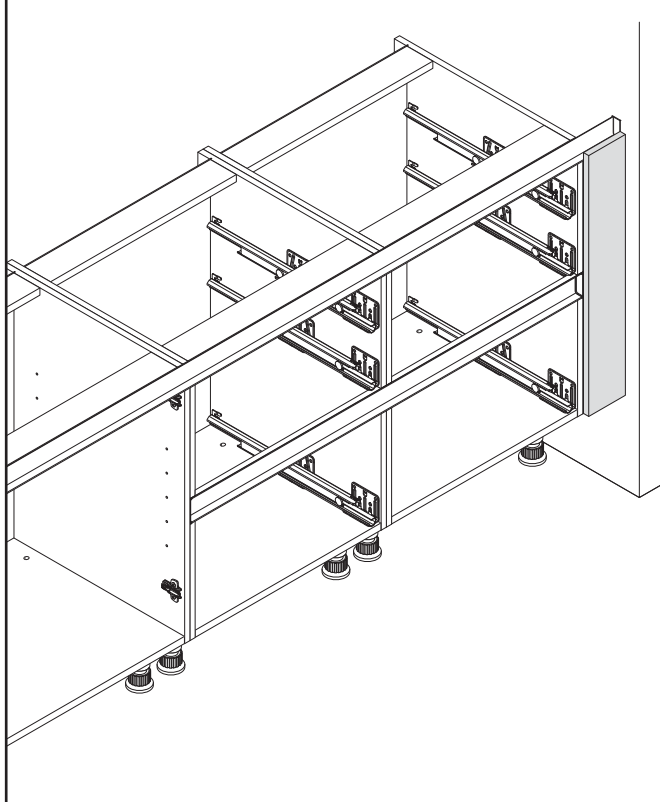


12

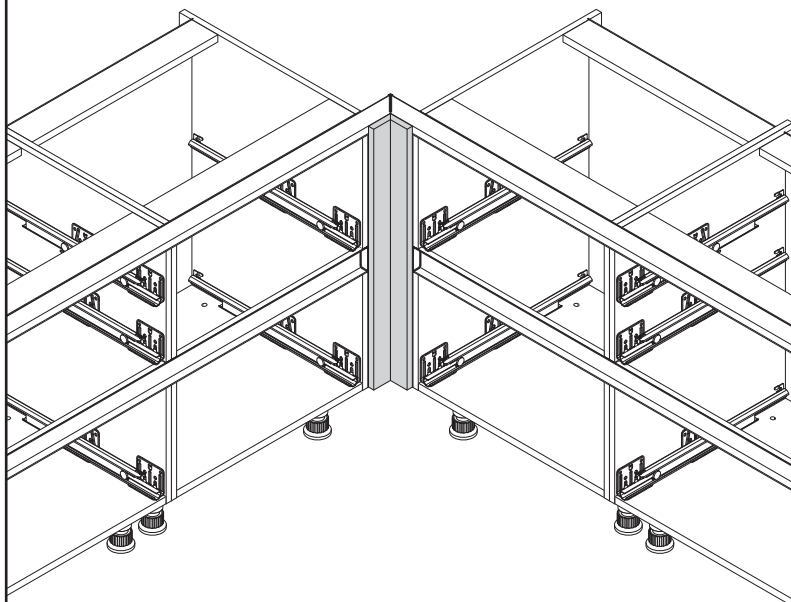






13

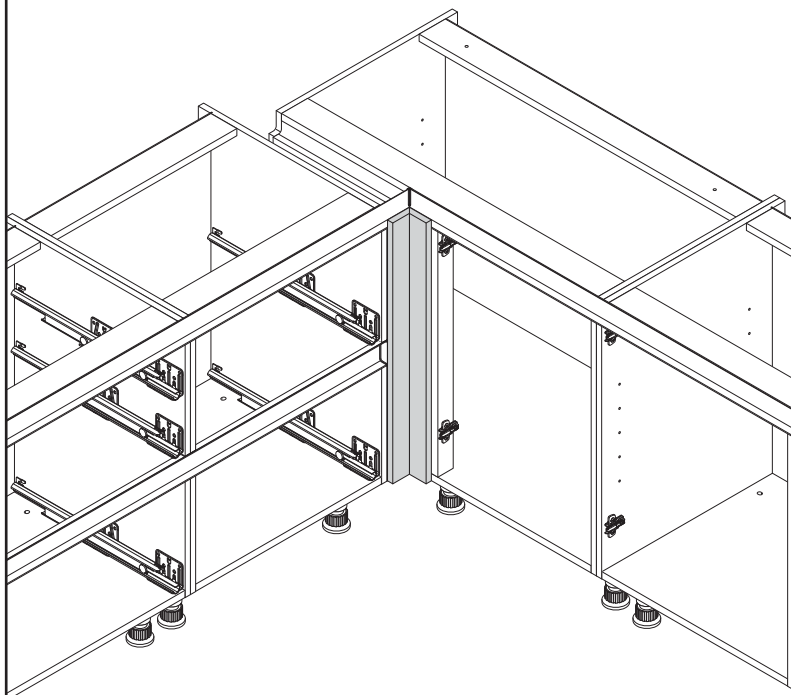



DE - Frontwangen / FR - Jouses décor / NL - Frontwanden / EN - Front uprights / ES - Costados frontales /
SE - Frontväggar / IT - Fianchi frontali / HR - Bočne stranice prednjice / SI - Sprednje stranice

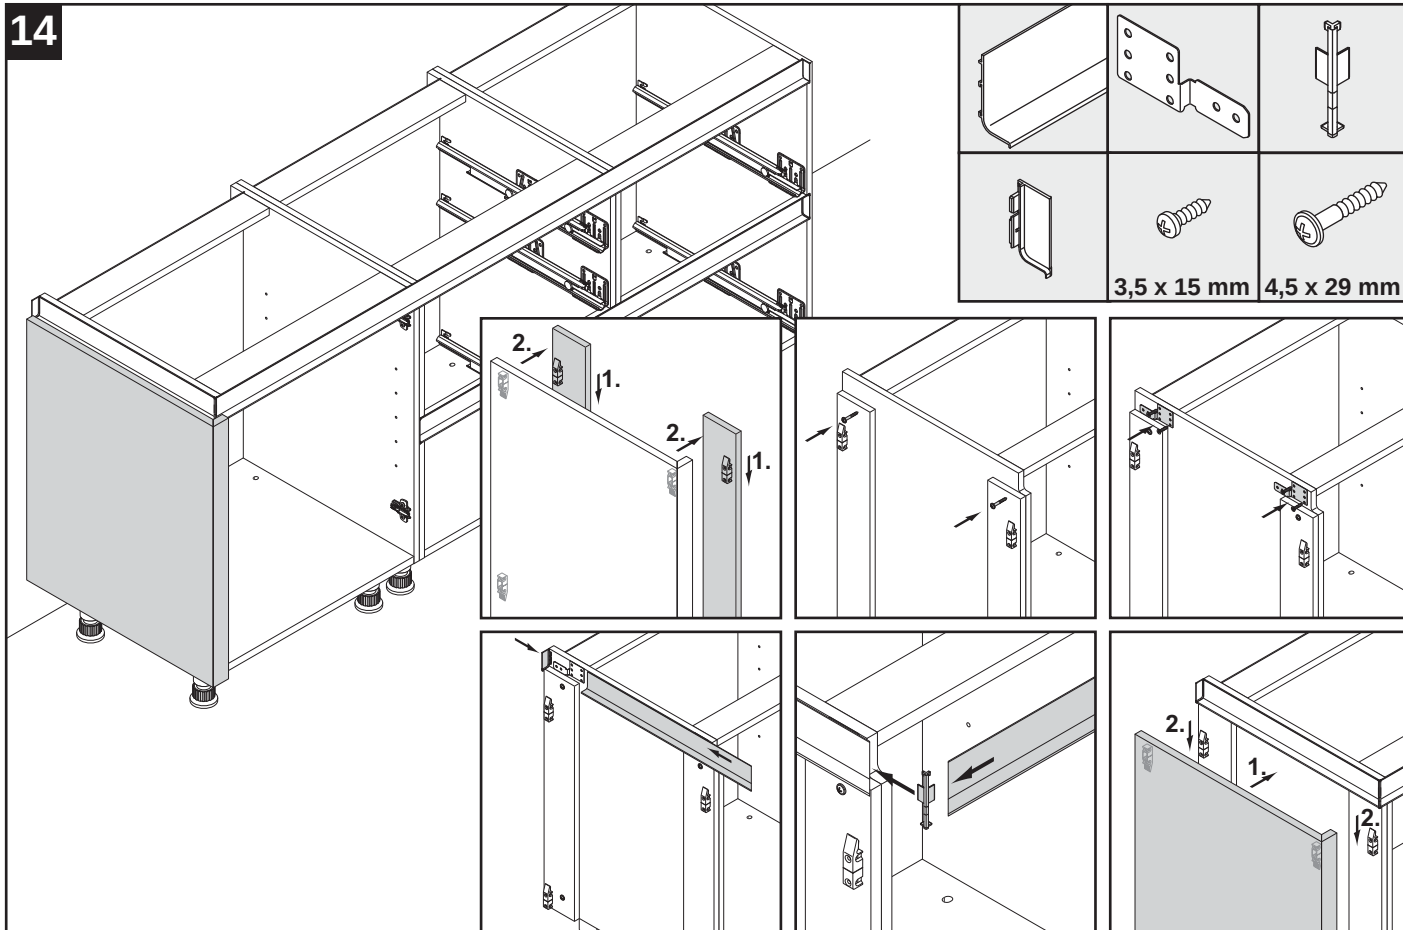






15

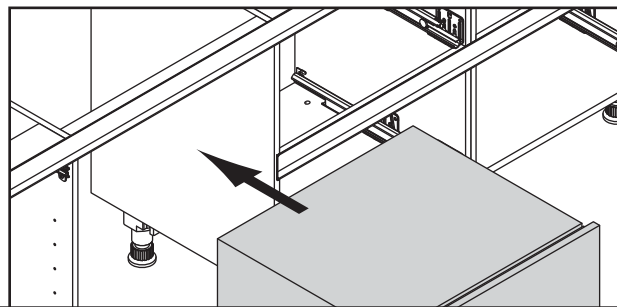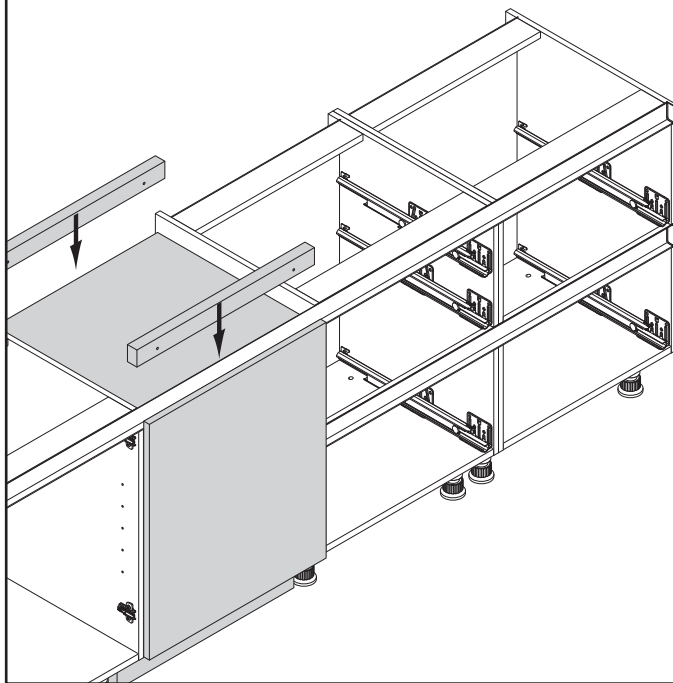






16


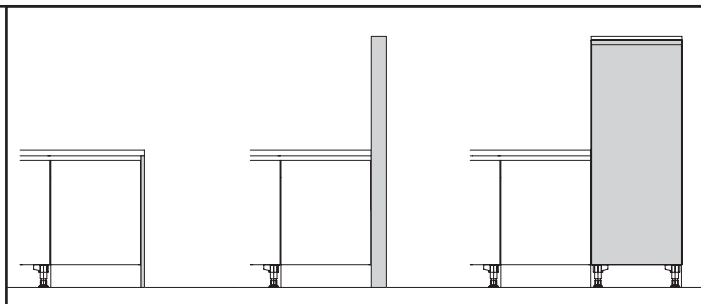



M4 x 25 mm


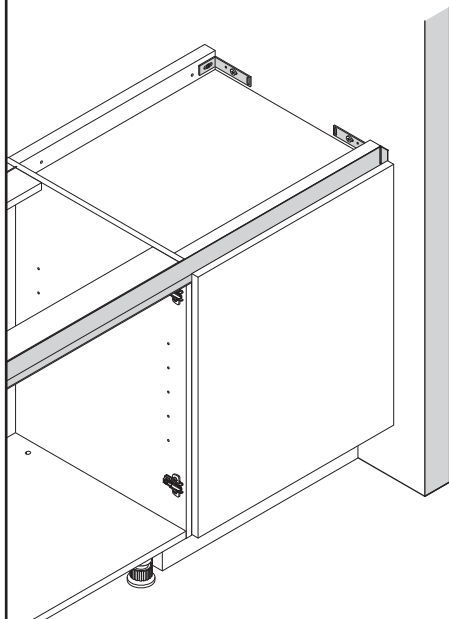



17

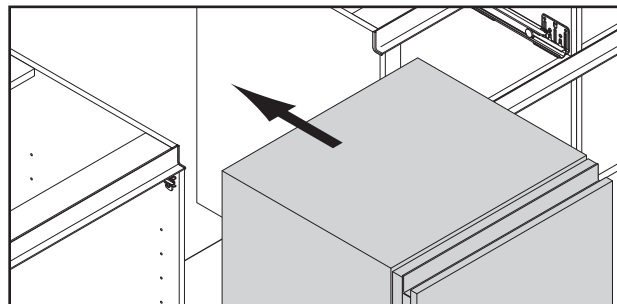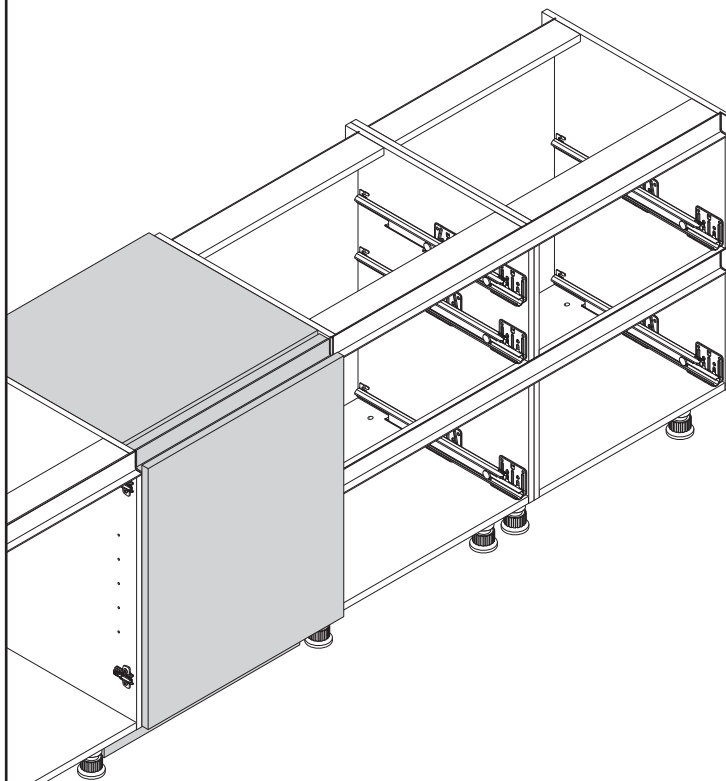


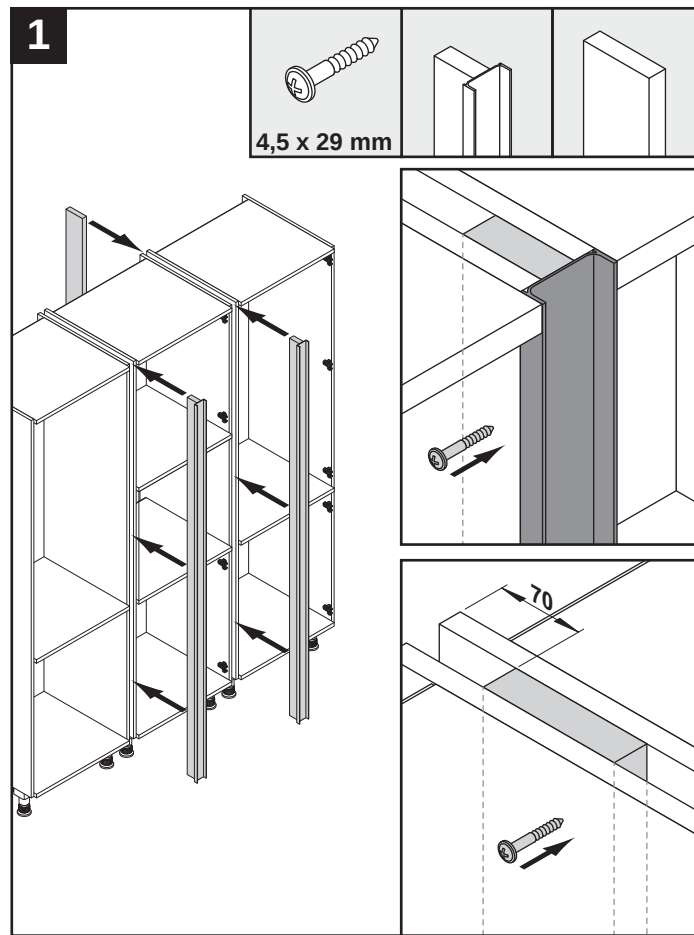
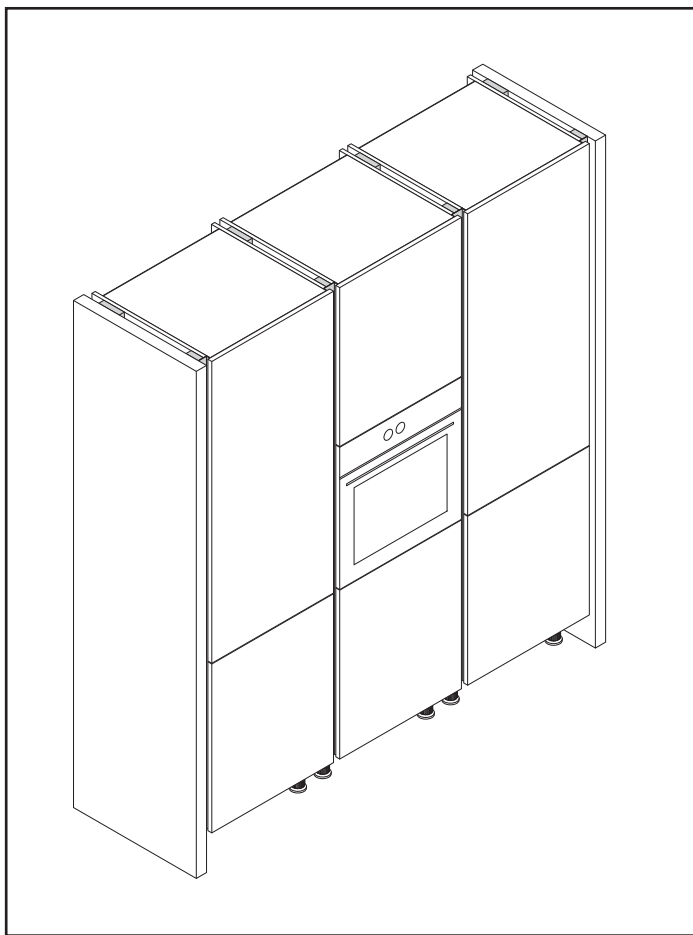



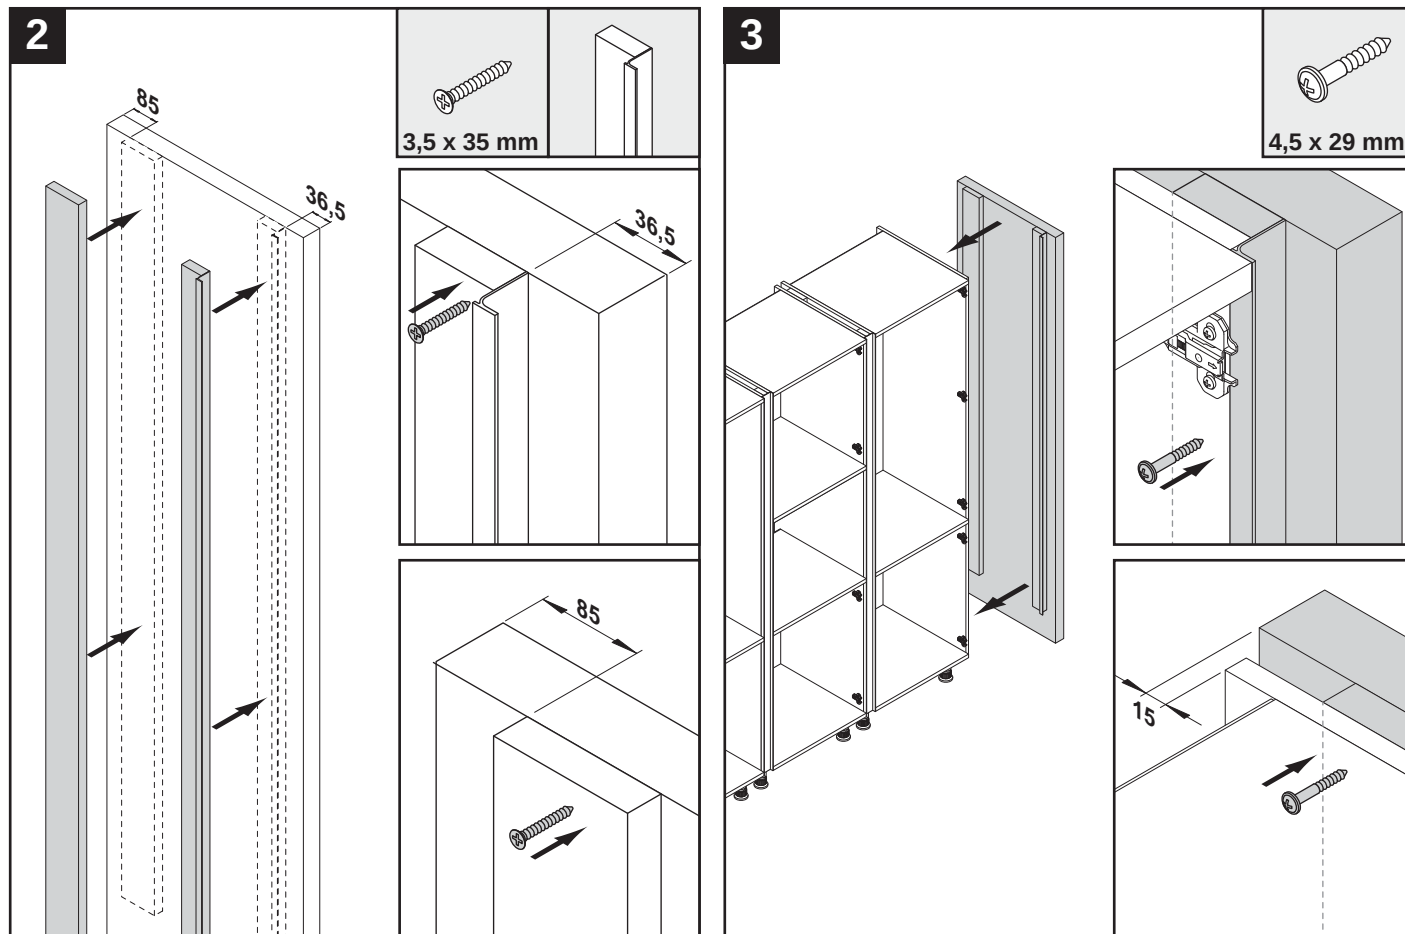


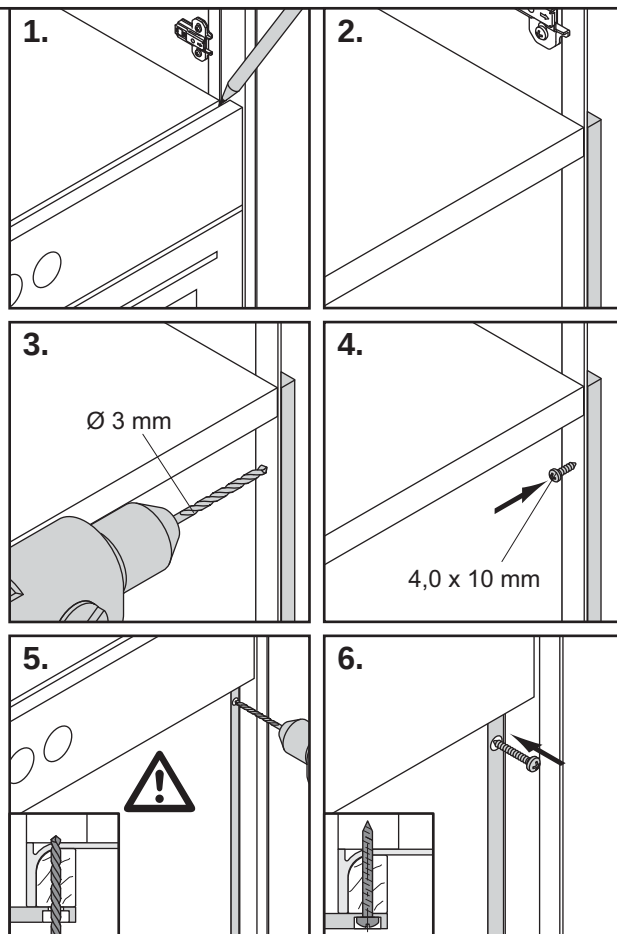
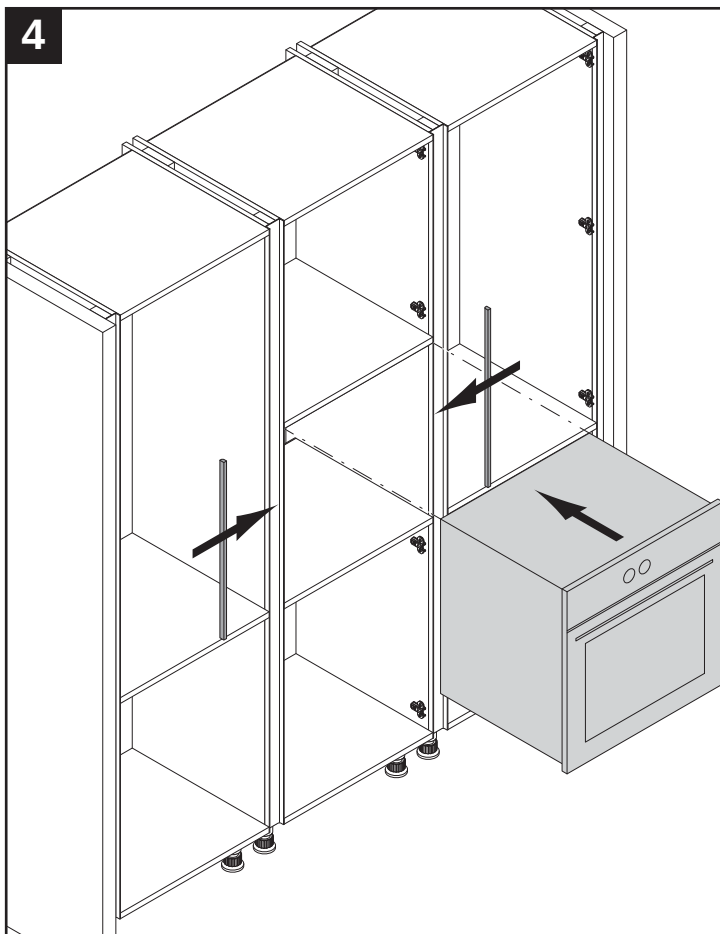



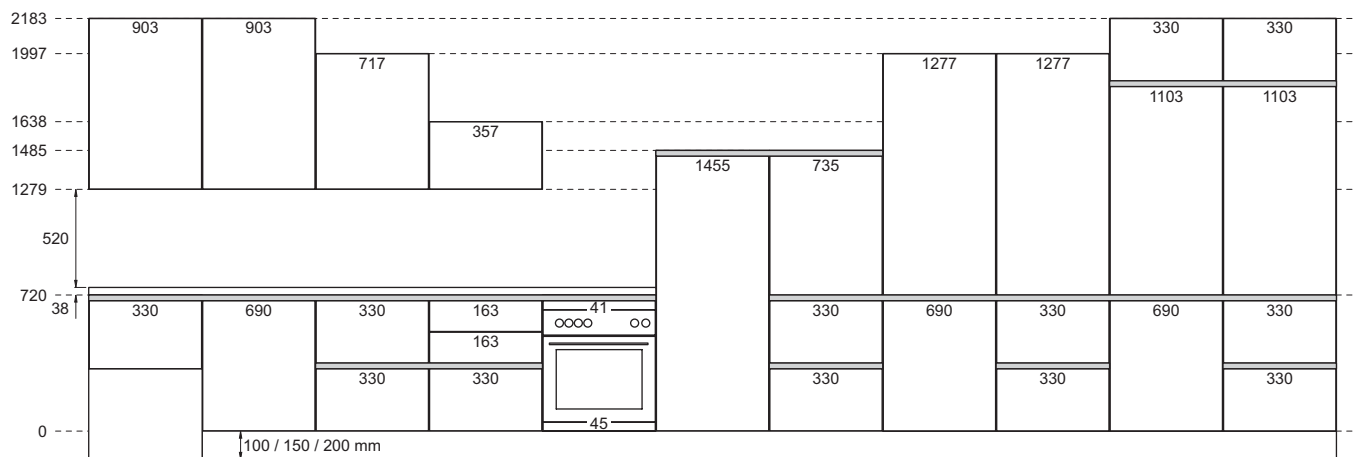



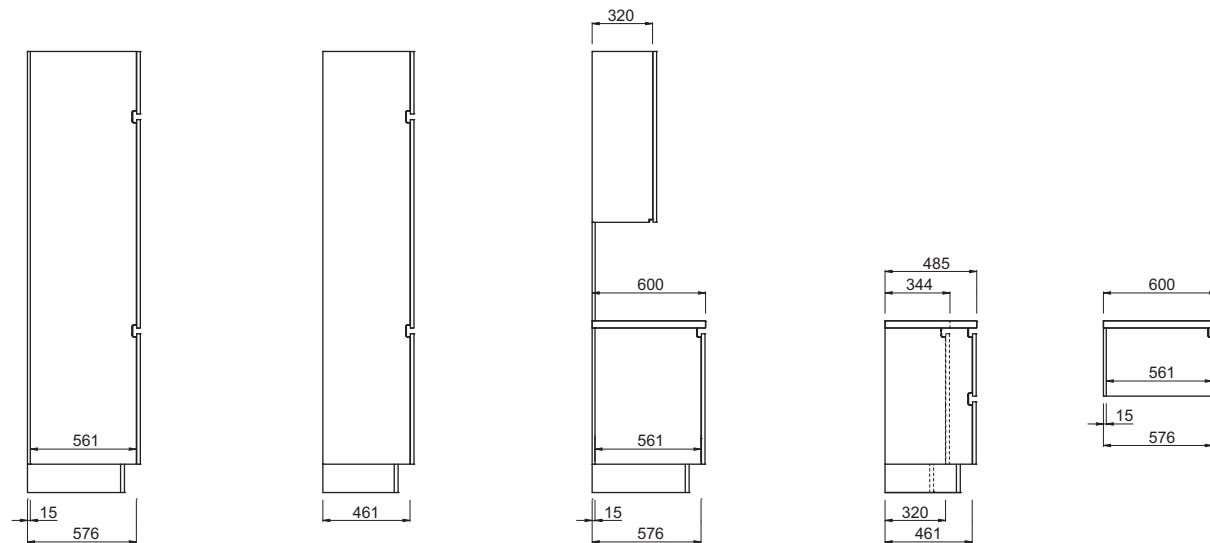


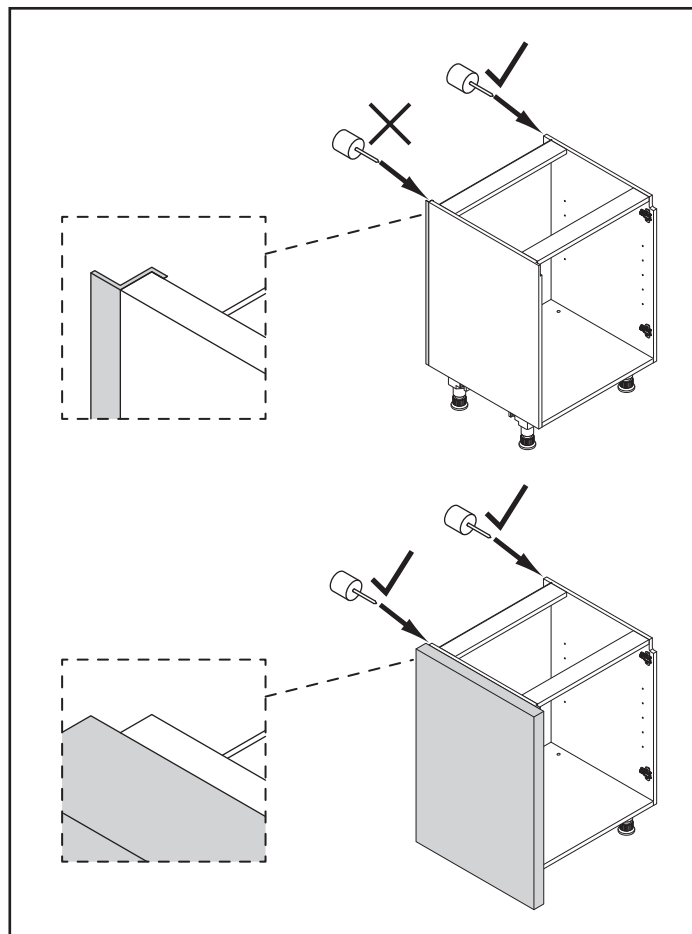
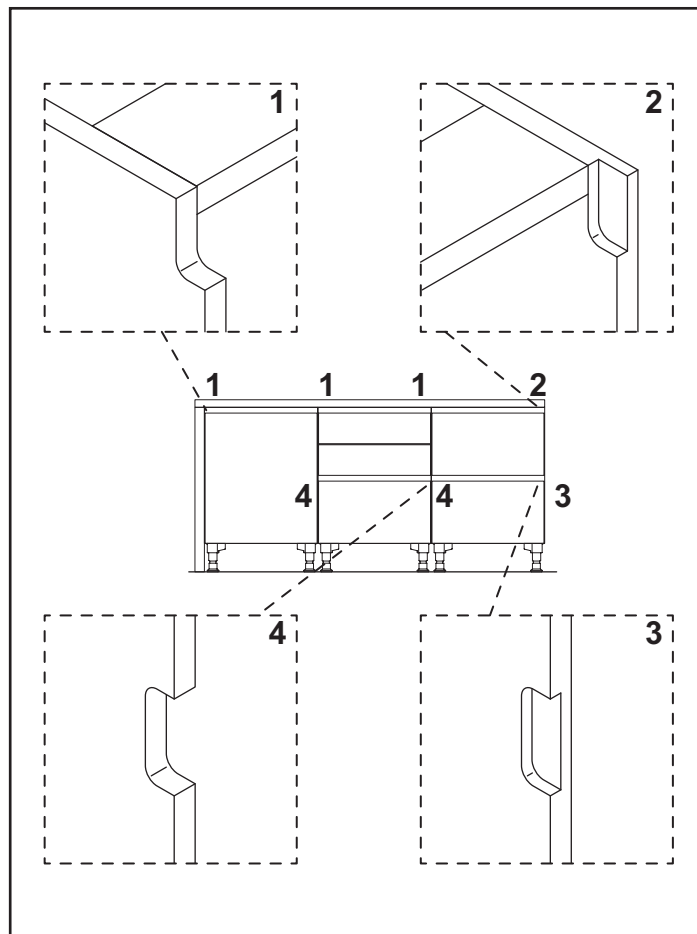


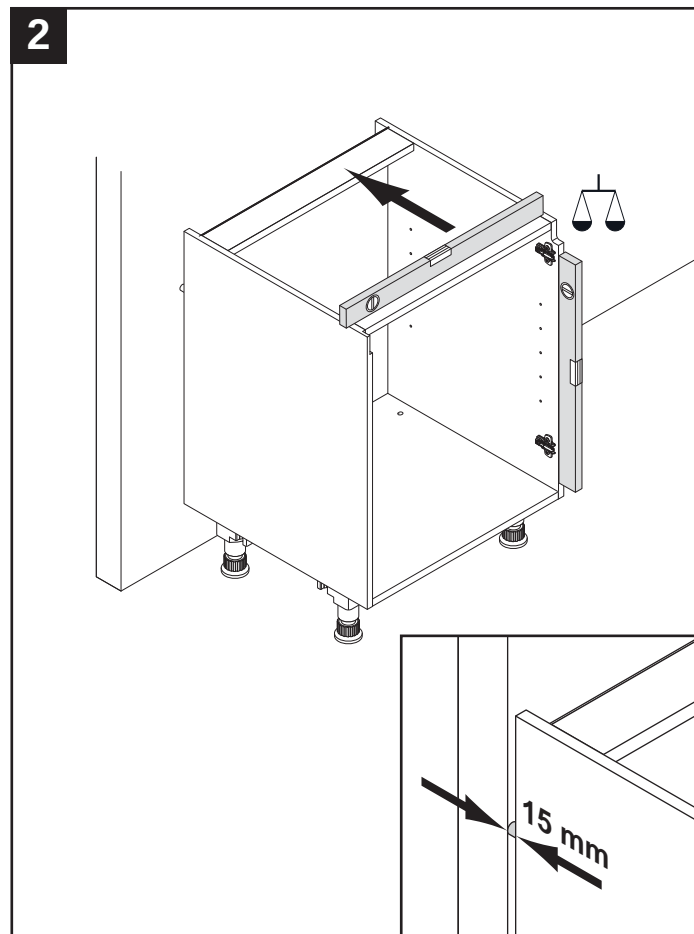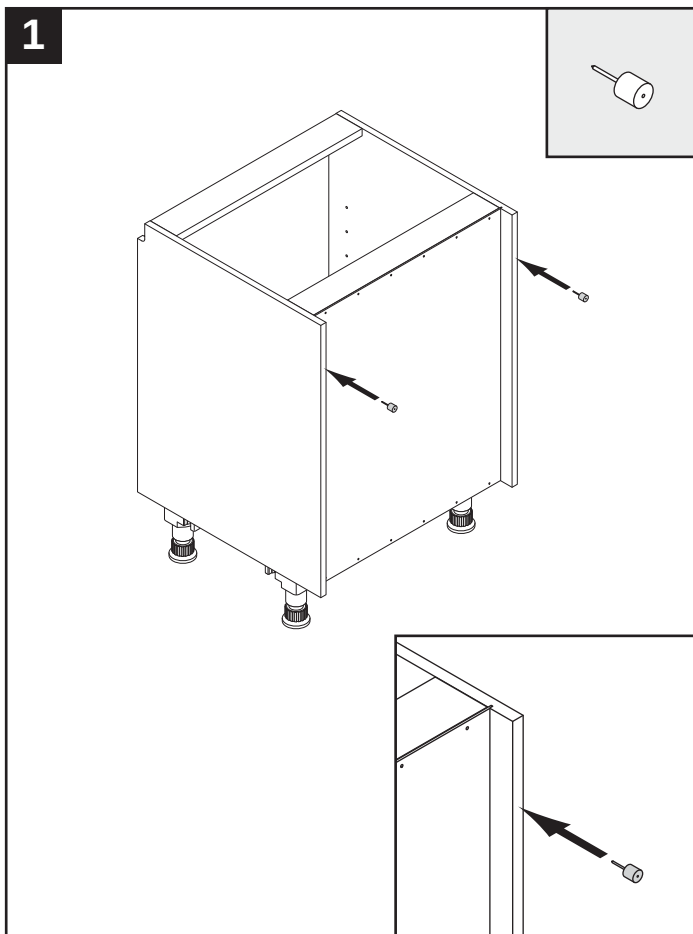






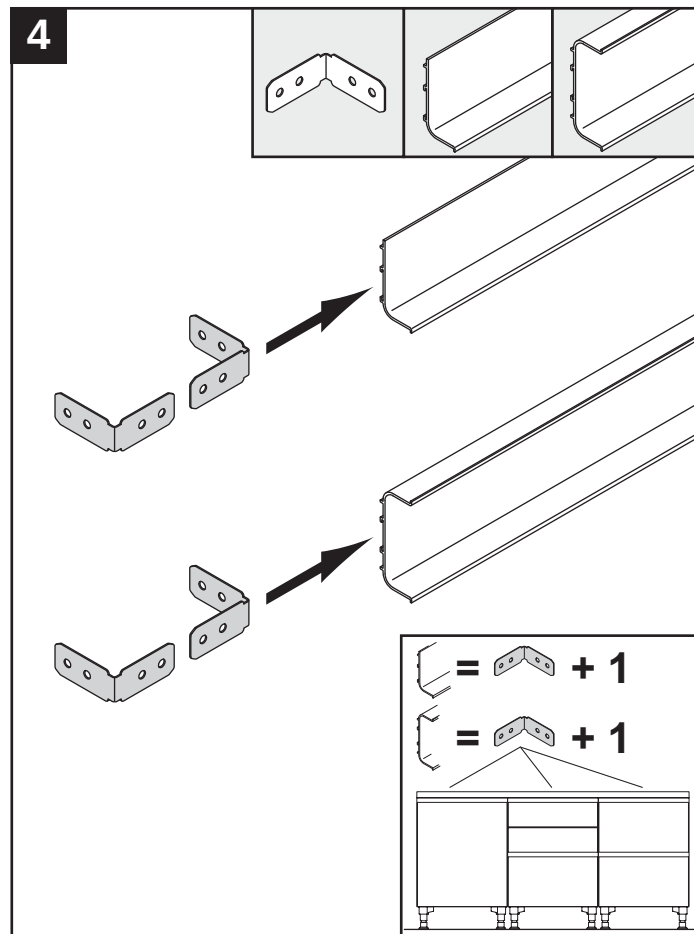
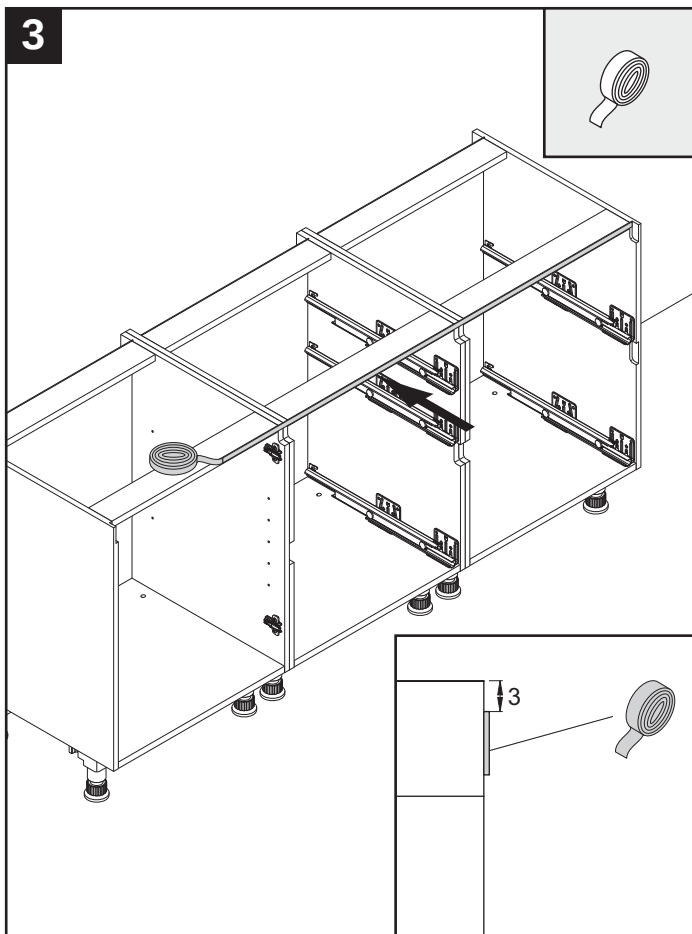


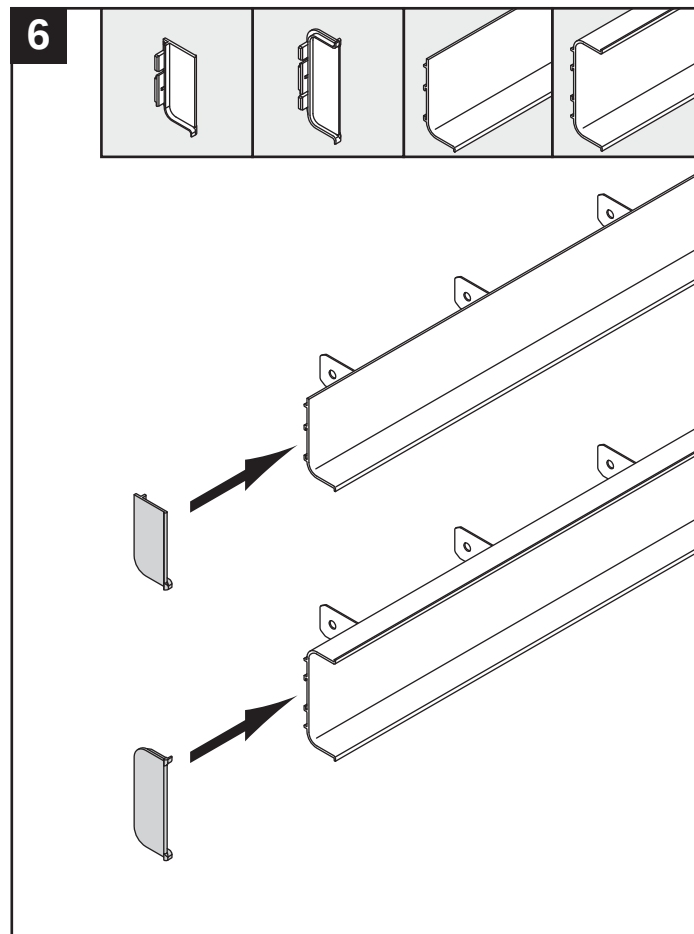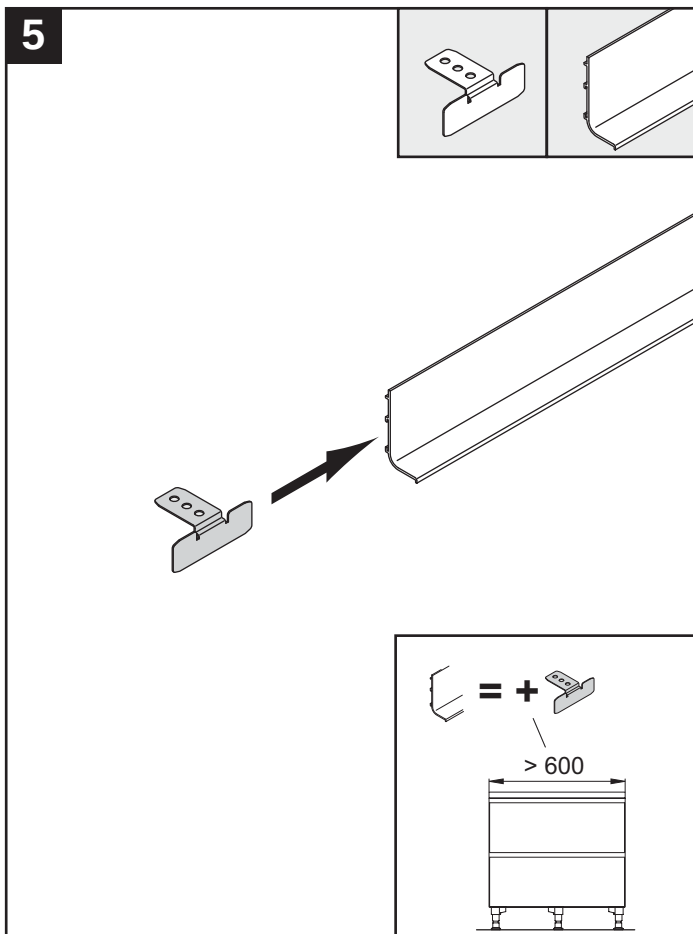

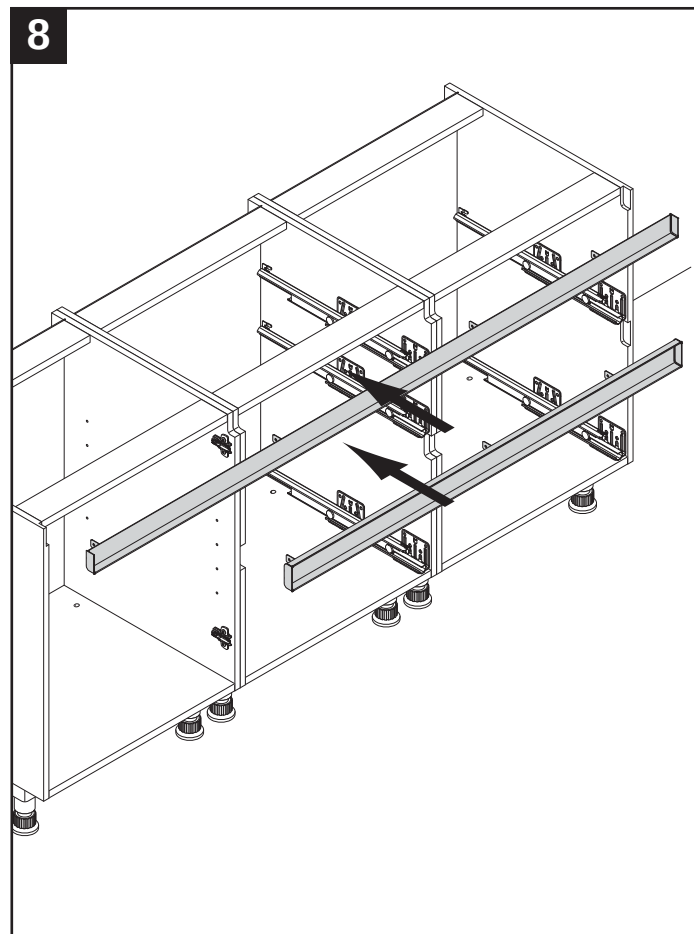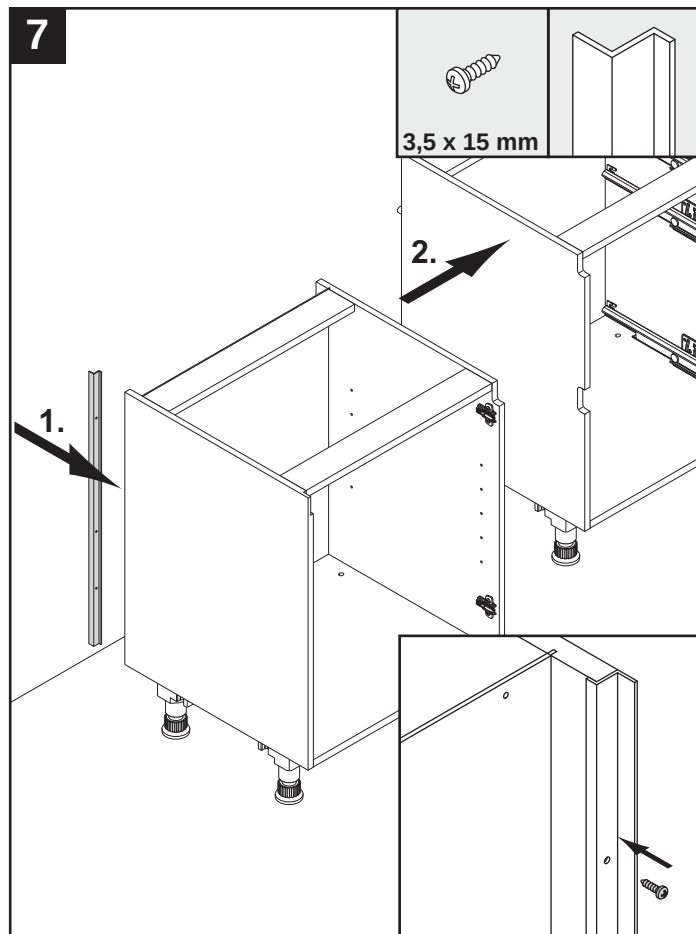


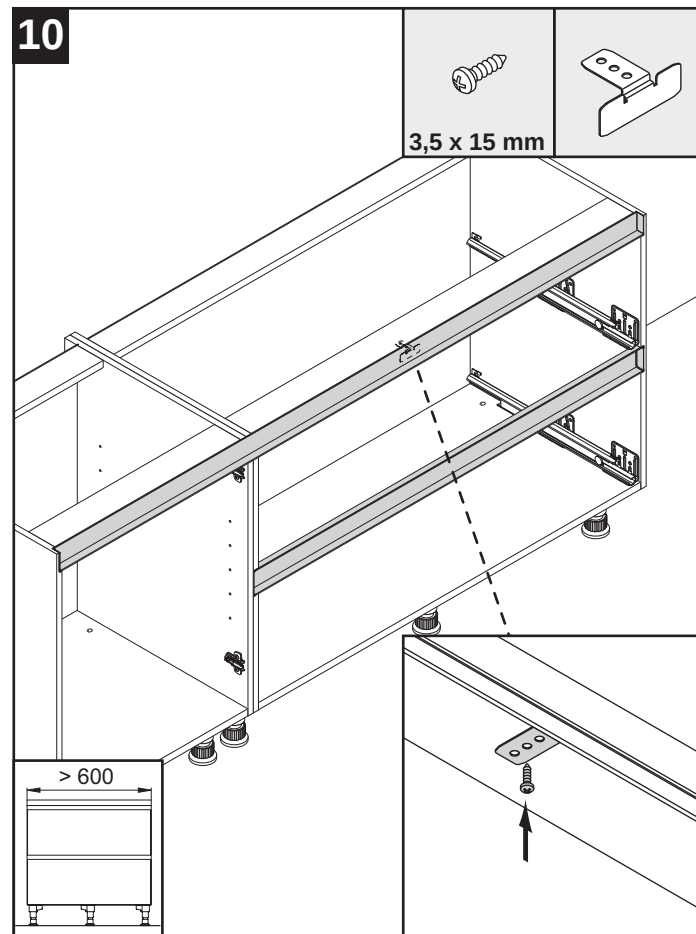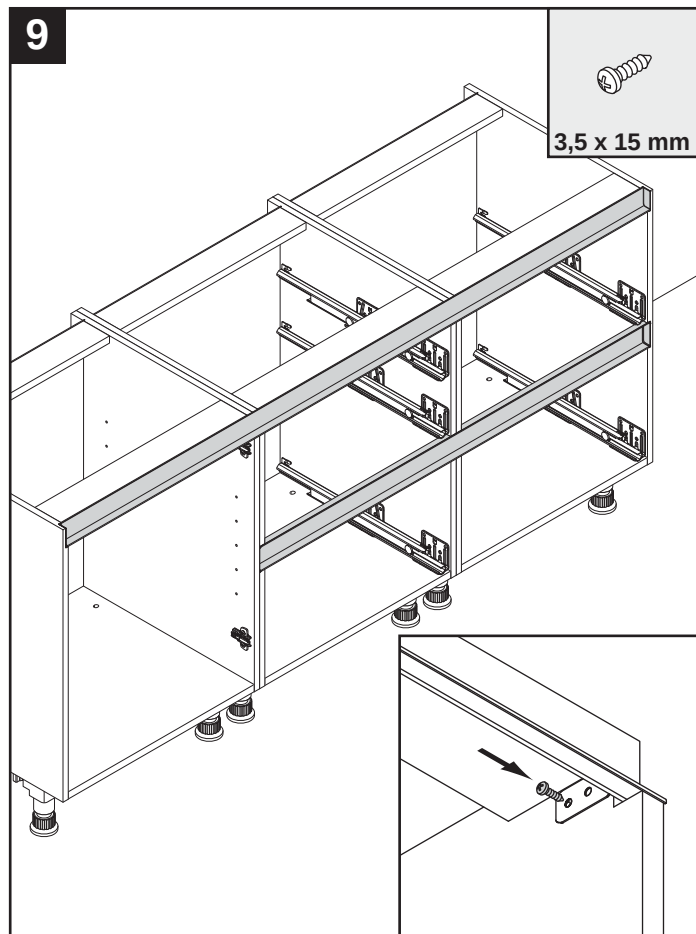







11

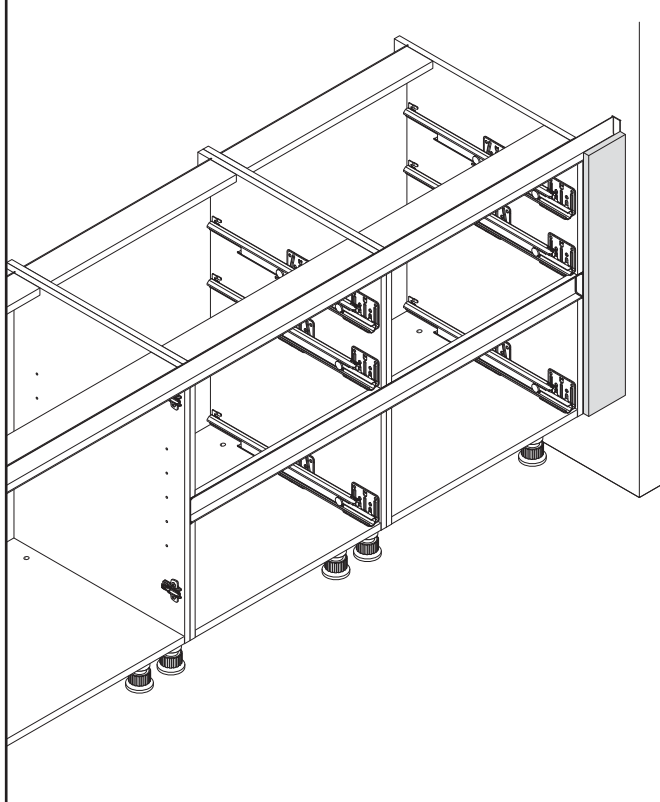


12

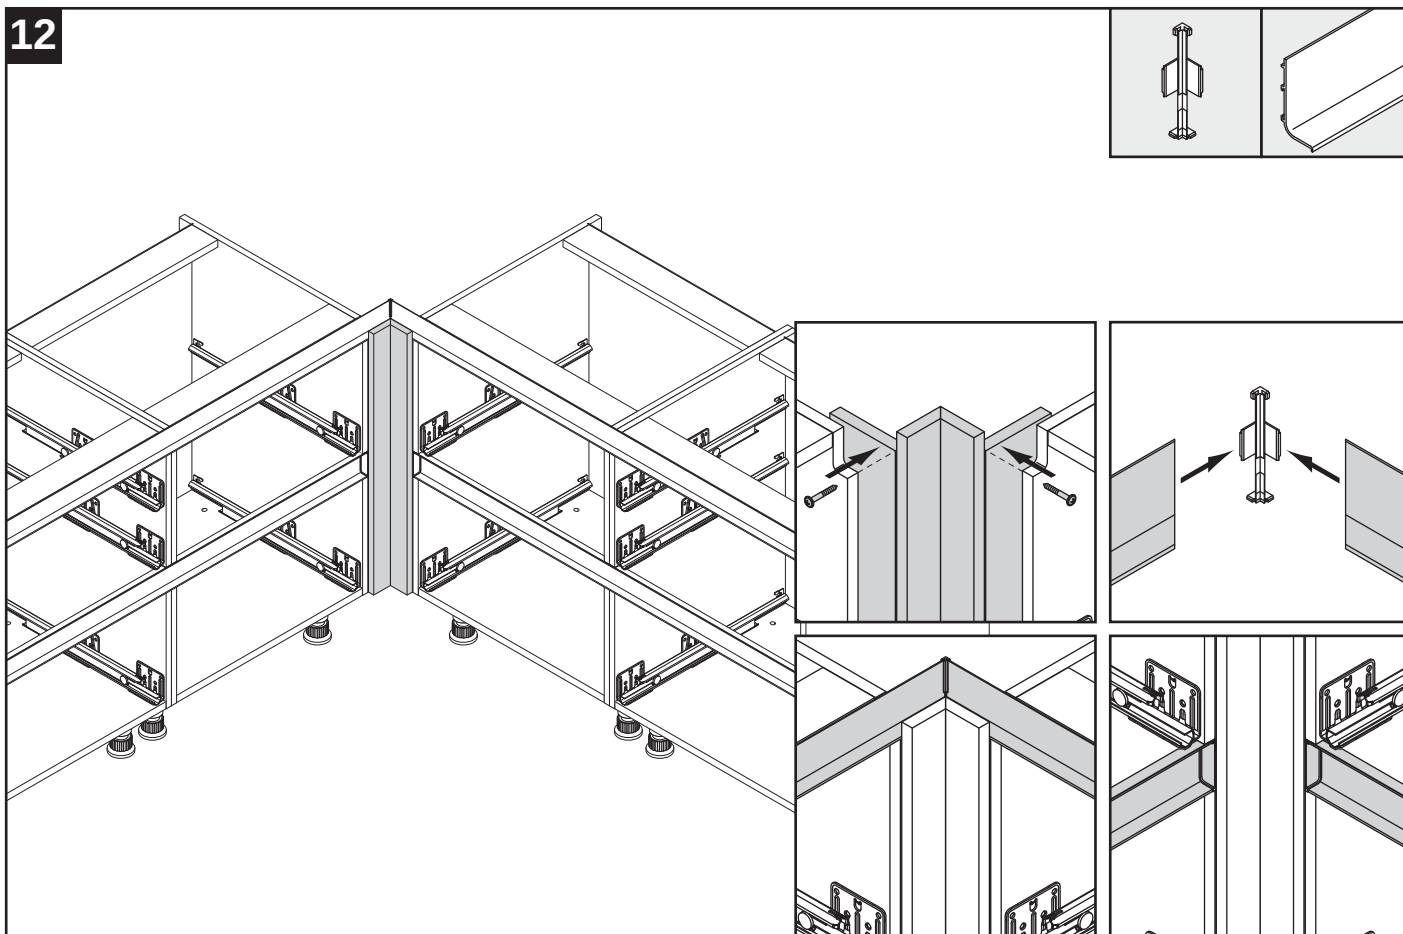



13

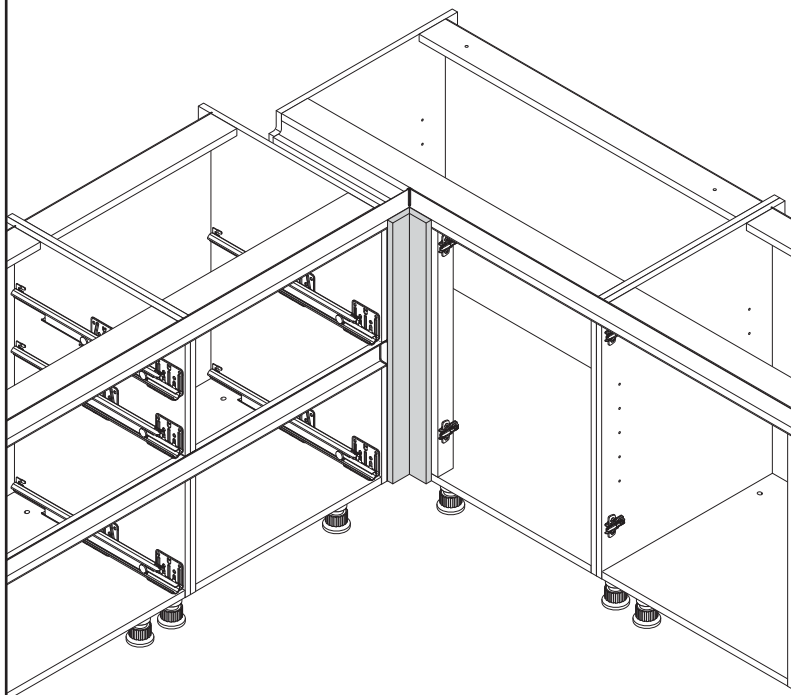




HU - Frontlapos / **SK** - Predná bočnica / **CZ** - Přední lícni stěny / **GR** - Μποροστίνα τοιχώματα / **TR** - Ön raç / **PT** - Elementos laterais da frente / **PL** - Ścianka boczna frontowa / **RU** - Декоративные фасадные боковые стенки / **DK** - Frontvanger

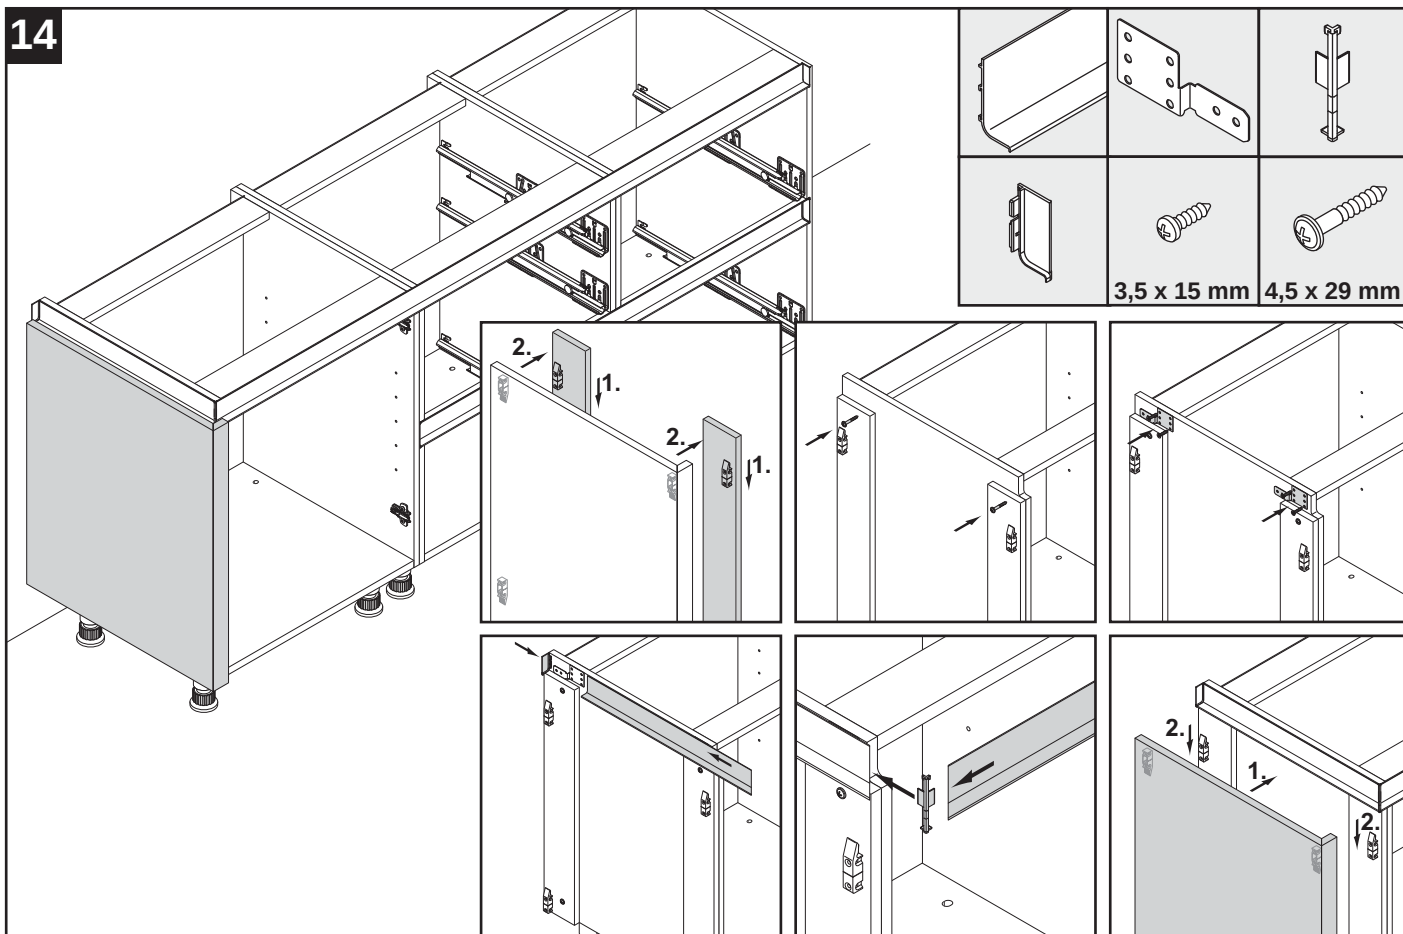



15

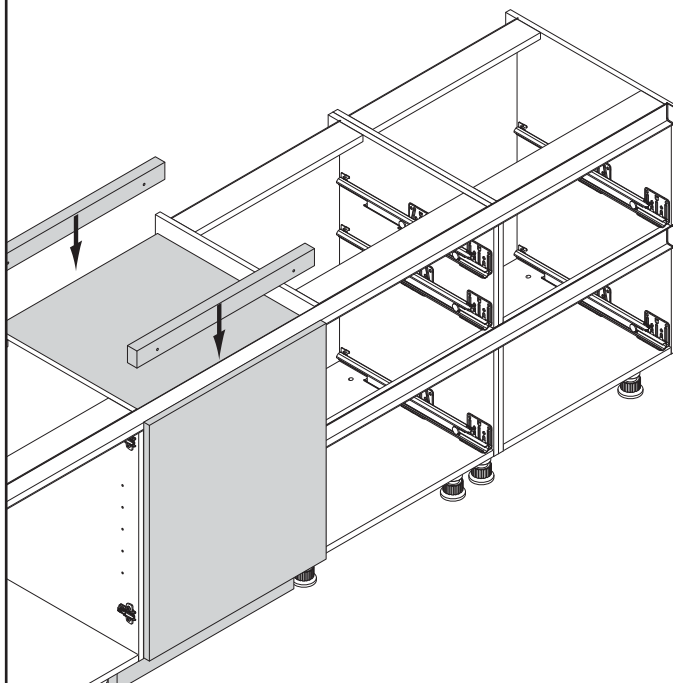






3,5 x 40 mm

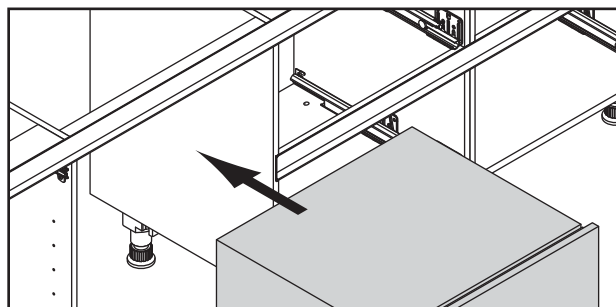

16

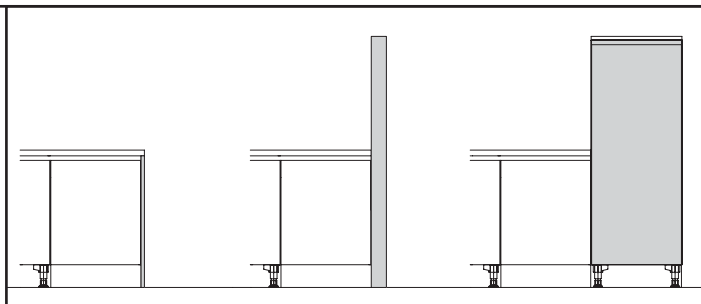

M4 x 25 mm

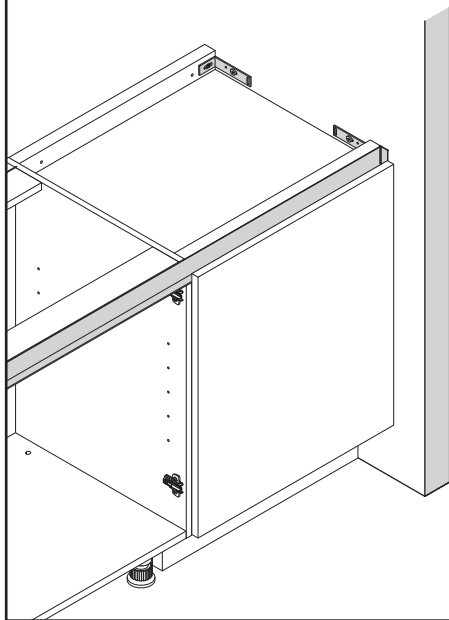

17

